



**ProGARM**<sup>®</sup>  
PROTECTING LIVES

# ARC FLASH & FLAME RESISTANT GARMENTS

21/22

**TRUST THE ARC FLASH SPECIALISTS**

**WWW.PROGARM.COM**

# 7 REASONS TO CHOOSE PROGARM® TODAY

## 01 WE'RE THE ARC FLASH SPECIALISTS

We are 100% focussed on arc flash and flame resistant clothing. When the lives of your team are at risk, isn't it better to trust a specialist?

## 02 INHERENT PROTECTION

Our unique VXS+ fabric is 100% inherent. This means the very fibres provide flame resistant protection for the life of the garment.

## 03 DURABILITY MATTERS

We're so confident that our arc flash garments last up to 70% longer than other leading brands that we provide a Lifetime Seam Guarantee.

## 04 QUALITY ASSURANCE

We hold ISO9001 for Quality Management and Module D accreditation for our supply chain, demonstrating our absolute commitment to production quality at every stage.

## 05 SAFETY ON THE BUTTON

Our anti-static ThermSAFE™ components (such as buttons and zips) are made from military-grade polymers, tested to keep working even after an arc flash incident.

## 06 PRACTICALLY PERFECT

Soft fabrics and handy pockets are for more than just style; your team are far more likely to wear the right PPE if they're comfortable and the garments are practical while working.

## 07 WE KEEP INNOVATING

As the industry leaders in innovation, we're always working to make good things better and are constantly working on the next generation of arc flash protection. Constant innovation keeps us well ahead of the pack.

# CONTENTS

## PRODUCT PAGES

18 SINGLE COLOUR COLLECTION

30 TWO TONE COLOUR COLLECTION

42 HI VIS YELLOW COLLECTION

54 HI VIS ORANGE COLLECTION


66 BASELAYERS COLLECTION

74 HEAD PROTECTION PRODUCTS

84 OTHER ACCESSORIES

07 WHAT'S NEW?

17 THE UK'S FIRST ARC FLASH SURVEY

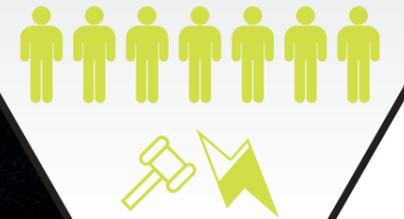

10 VXS+ FABRICS

12 GREAT GARMENTS MAKE PROGARM® THE RIGHT CHOICE

## INFORMATION PAGES

- 04 Welcome to ProGARM®
- 06 ProGARM® Industry Sectors
- 07 What's New?
- 08 ProGARM® - The Facts
- 10 VXS+ Fabrics
- 11 Top Class Production
- 12 Great Garments Make ProGARM® the Right Choice
- 14 EN Standards - A Brief Summary
- 15 Arc Flash Explained
- 16 Protection in Layers
- 17 ProGARM® Arc Flash Survey
- 90 Product Care
- 92 PPE Directive
- 93 Care Labels
- 94 EN Standards Explained
- 102 Product EN Standards Matrix
- 108 Size Chart
- 111 Branding and Garment Alterations
- 112 Notes

102 PRODUCT MATRIX

92 PPE DIRECTIVE

# ARC FLASH PROTECTION: THE NEXT CHAPTER

## YOU CAN DEMAND THE BEST

The safety of your team is paramount, and we provide the ultimate flame resistant protection against the life-threatening arc flash risks they face every day.

We're pioneers and we're trailblazers.

I know we are leading the industry with our exciting new ranges and safety innovations.

### BLAZING A TRAIL

Specialising in arc flash protection drives us to innovate faster than any generalist PPE supplier and focus 100% on bringing you the best in arc flash protection.

### YOUR TEAM DEPEND ON US

To protect them when they need us. That's why we never compromise on safety. On innovation. On comfort, quality or durability. Our garments provide the best possible protection; everyday practicality and comfort.

### BUSINESSES DEPEND ON US

We're trusted by some of the UK's largest brands to keep their teams safe.

### HOW CAN YOU TELL IF YOU'VE GOT THE BEST?

We take such pride in our work that we're massively proud to put our name on it. If you want the best, it will say ProGARM® on the label.

### TALK TO ME

We maintain our industry leading position throughout Europe because we are always listening. If there's something – anything - you want to say, please do get in touch.

Stay safe and don't compromise.



**TONY ARNETT**  
Managing Director



To stay safe, your team need to wear the right protection. That's why we invest heavily in making our clothes comfortable and practical too. That way they will be happy to wear them.

### DEMAND THE BEST IN SAFETY AND PROTECTION

All our protective garments conform to UK and EU PPE regulation and display the correct care labels to guarantee certification and traceability.

Often exceeding industry and EN standards, we're always researching and testing materials and designs to lead the way in arc flash protection.

### DEMAND THE BEST IN QUALITY, DURABILITY AND VALUE

Our high-quality materials and durable designs mean our garments last up to 70% longer than other brands, providing outstanding value for money.

“ We have had these trousers for over 6 months and they are still going strong.

Before, we had to replace trousers nearly every three weeks. ”

### DEMAND THE BEST IN COMFORT AND INNOVATION

To make sure your colleagues wear the PPE you provide – and wear it correctly – our specialist in-house team has researched and designed both male and female ranges with practicality and wearer comfort in mind.

Breathable, soft to the touch and versatile with useful pockets and design features to suit wearer needs. That's why some of the world's largest businesses rely on us to deliver the protection and comfort their team needs, day in and day out.

# ARC FLASH PROTECTION EXPERTISE IN YOUR SECTOR

## It's our business to know your business

ProGARM are one of the largest suppliers of arc flash and flame resistant garments in the UK and, to make sure we're giving you what you need to keep your teams safe, we make it our business to understand yours.

We work with a wide range of sectors, particularly traditional and renewable power generation, civil engineering and utilities, rail and petrochemical. We employ arc flash protection experts who understand your sector and the associated risks.



### UTILITIES

HSG47 highlights the significant risk of a cable-strike during groundworks and the potentially life-changing injuries or fatal consequences of an arc flash incident.



### INDUSTRIAL ELECTRICAL

The EU and HSE are specifying increasing levels of arc flash and flame resistant protective clothing. We can help you make the right choices.



### RAIL

Our comprehensive range of hi-vis orange garments comply with RIS-3279-TOM (replacing UK GO/RT 3279) and are safe, durable and comfortable for groundworks and electrification projects.



### WINDPOWER

Not only do we understand the specific risks in this sector, but our garments will provide excellent protection against the elements, keeping your team warm and dry as well as the arc flash protection to keep them safe.



### POWER GENERATION

We understand power stations, renewables and transmission environments, and help safeguard your team against both arc flash incidents and the weather as needed.



### PETROCHEMICAL

The similarities between arc flash and flash fire incidents mean we've become an established and trusted provider of safety clothing in the petrochemical sector.

# WHAT'S NEW?

We're continuing to lead the way.

With more new innovating products and a culture of consistent improvement, there is plenty for us to shout about that's new in our latest catalogue.

## LAUNCH OF OUR FIRST EVER WELDING PRODUCTS!

Constructed from innovative Siloxane fabric, which provides a good mix of durability, dexterity and comfort. Our premium flame resistant 2205 welding apron with removable and adjustable lower portion and elasticated fastening, is ideally teamed with longer length 2200 welding gaiters, both suitable for use with all types of arc welding and providing protection from molten metal splashes, sparks and slag when welding, grinding or cutting.

Pg 89 →



## ADDITIONAL HI-VIS CERTIFICATION FOR THIS JACKET & TROUSERS COMBO

The 5805 AF & FR jacket features extensive hi-vis areas to ensure delivery of Class 2 EN ISO 20471 hi-visibility performance, helping operatives and drivers to be better seen at night. Match these with the Class 1 5815 arc flash trousers (available as 5810 ladies fit) these products are all constructed from super-soft, 300gms, VXS+ Inherent fabric. Pg 34 & 35 →



## ARC FLASH DUNGAREES YOU ASKED, WE LISTENED!

New to the ProGARM® range are the 7522 arc dungarees featuring improved fabric performance from our highest quality ripstop weave fabric. We have also added Cordura® knee reinforcements which are good up to 200,000 abrasion cycles. Plus, they offer superb comfort and durability for the wearer - of course! Pg 37 →



## FR & AF HI-VIS COMBAT TROUSERS - WITH ADDED STORAGE

Improved garment durability ranks high with the 7715 hi-vis combat trousers. From the innovative ripstop fabric, external kneepad pockets to fit 2240 FR kneepads, stitched on 5cm and 7cm FR/AS industrial wash reflective tape, plus added Cordura® knee and hem reinforcement. Add to this, an assortment of open and secured pockets for safe storage of mobile phones and easy access to tools - these really are a winner! Pg 36 →



# PROGARM® QUALITY- THE FACTS

As well as improving safety, our continuous focus on quality means our garments lead the way in comfort, practicality and durability - giving you outstanding value for money by standing up to the rigours of everyday use for longer.



## PRODUCT DEVELOPMENT

We listen to our customers and end users, taking on board feedback and suggestions to develop all our styles, ranges and innovations.



## UNIQUE PROGARM® DESIGNS

Developing our own designs means we can constantly innovate and improve. We can also accommodate any special design requirements that you need.



## ISO9001 AND MODULE D

As well as ISO9001 we are Module D accredited, demonstrating our commitment to high quality standards throughout our supply chain. The result: better materials, efficient manufacturing and an outstanding customer experience.



## LIFETIME SEAM GUARANTEE

All our garments carry a market-leading lifetime guarantee on all structural seams.



## OEKO-TEX® CERTIFIED

OEKO-TEX® is an independent testing system in textiles, enhancing product safety and sustainable production. Wherever possible, we only use products from OEKO-TEX® approved suppliers.



## DURABILITY

50-wash certified, inherent fabrics, tensile strength and abrasion tested, a lifetime seam guarantee... our longer-lasting garments deliver outstanding value for money.



## QUALITY FABRICS

Our VXS+ fabrics and quality assured manufacturing processes are the foundation of the ProGARM® product range. As well as protection, fabric is selected for durability, performance, comfort and how well it will wash.



## QUALITY COMPONENTS

Our anti-static ThermSAFE™ components (such as buttons, press studs and zips) are made from military-grade polymers, tested and safety approved to continue working after an arc flash incident, allowing quick garment removal for First Aid.



## EUROPEAN PRODUCTION

For speed, quality control and traceability, all our garments are made in the EU.



## RIGOROUS PRODUCT TESTING

As well as wearer trials, we also test seams, components and fabrics in specialist lab conditions to understand and maximise performance.

# ABOUT VXS+ FABRICS



## INHERENT VS TREATED FABRICS

VXS+ inherent fabrics provide the ultimate protection. Unlike chemically treated fabrics, the very fibres of inherent fabrics are flame resistant, and because that protection doesn't wash out, the wearer stays safe throughout the life of the garment.

## HIGH-PERFORMING, INNOVATIVE FABRICS FOR ULTIMATE COMFORT AND PROTECTION

For decades, flame resistant garments have meant uncomfortable, heavyweight cotton drill fabrics that would shrink extensively with washing. This all changed with the introduction of our VXS+ inherent fabric.

With our ProGARM® VXS+ fabric, wearers can now benefit from:



### ✓ INSTANT EXTINGUISHING PROPERTIES

The fibre blend of our VXS+ inherent fabrics offers outstanding performance compared to more expensive aramid fabrics.



### ✓ GREAT COMFORT

Using advanced textile technology, all of our products are designed for optimum softness, breathability and comfort.




### ✓ HIGHLY DURABLE

After 50 industrial washes, our garments outlive, outshine and outclass the competition in durability, appearance and strength, with excellent colour fastness and less than 3% shrinkage.

## LIMITING OXYGEN INDEX (LOI) TESTING

Limiting Oxygen Index (LOI) is the amount of oxygen required in the atmosphere for a material to ignite. With an oxygen percentage of 21% in the earth's atmosphere, anything that has an LOI of less than 21 will burn quickly and easily. An example of this is cotton, which has an LOI of 17.

VXS+ Modacrylic, with an LOI of 34, is much more flame resistant than other materials including aramid fibres, which have an LOI of 28-29. That's why VXS+ Modacrylic is a top-performing flame resistant solution in the market, especially for severe risks like electric arc.

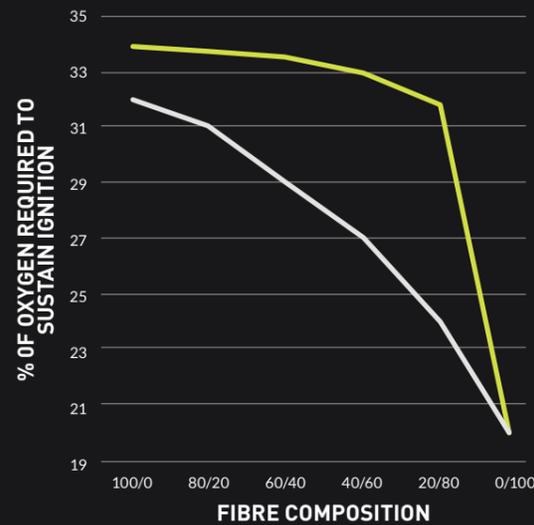

Fibre Composition	VXS+ MODACRYLIC & COTTON	STANDARD MODACRYLIC/ COTTON
100/0	33.8	32
80/20	33.6	31
60/40	33.4	29
40/60	33	27
20/80	31.8	24
0/100	20	20

# TOP-CLASS PRODUCTION, TOP-CLASS GARMENTS

“We’re 100% committed to producing the best arc flash and flame resistant safety wear on the market. We’re 100% committed to innovating and producing garments that work and last as they should. And we’re 100% committed to quality control.”

## GOING THE EXTRA MILE

ISO9001 accreditation is widely known as the recognition of robust company processes, quality control and customer service.

Module D accreditation goes further, and recognises our commitment to quality control throughout our manufacturing supply chain processes such as fibre manufacture, yarn development and dyeing.

Every partner is regularly audited by an independent accredited body, and every batch of fabric is certified and documented as meeting our exacting standards, with batch numbers being included on garment labels for complete traceability.

## RIGOROUS TESTING FOR YOUR REASSURANCE

As part of our rigorous quality control, we test EVERY garment design for protection against arc flash. We repeat testing as often as prescribed under the EN Standard but, in practice, we’re innovating so regularly that we’re usually testing upgraded garments before previously released versions are due to be re-tested.

Even individual components such as zips, buttons and press studs are regularly tested and certified to make sure they’re safe, and will keep working after an incident to allow First Aiders to remove garments easily.

We also test all of our garments for their structural integrity in the seams, testing against flame spread, their strength to withstand an arc flash and also their durability to stand up to the rigours of day-to-day wear. That’s why we confidently offer our Lifetime Seam Guarantee.

**LIFETIME SEAM GUARANTEE**

# GREAT GARMENTS MAKE PROGARM® THE RIGHT CHOICE

All of our garments have innovative features, created with the end-user in mind, and benefit from our unique 100% inherent VXS+ fabrics and ThermSAFE™ components. Here are some of the ways our garments set the standard.



**SAFETYICON™  
MARKINGS**  
Clear at-a-glance guide to help people choose the right garment for the job, with instant recognition of the protection capabilities



**TRIPLE  
STITCHED  
SEAMS**  
Increases the durability and life of the garment



**DOUBLE  
STITCHED  
REFLECTIVE  
TAPE**  
Ensures reflective tapes stay intact to increase the life of the garment



**EASY-  
STRETCH  
PANEL**  
Improves the range of movement, especially when stretching the arm



**INTERNAL  
ELASTICATED  
WAISTBAND**  
Gives improved garment fit for safety and comfort



**GAS  
MONITOR/  
RADIO LOOP**  
A secure location point for a gas monitor, radio or other portable item



**INTERNAL  
KNEEPAD  
POCKETS**  
Allows kneepads to be added for wearer comfort and protection

# EN STANDARDS AT A GLANCE

You can find more detailed information regarding the above EN standards at the back of the brochure.

For more information on the updated PPE Directive, take a look at our summary on page 92.



## RIS-3279

Rail industry standard - high visibility clothing

Page: 95



## BS EN 1149-5

Protective clothing - electrostatic properties

Page: 95



## IEC 61482-2

Protective clothing against the thermal hazards of electric arc

Page: 96



## BS EN ISO 11611

Protective clothing for use in welding and allied processes

Page: 97



## BS EN ISO 20471

High visibility clothing - testing methods and requirements

Page: 98



## BS EN ISO 14116

Protection against heat & flame - limited flame spread

Page: 98



## BS EN ISO 11612

Clothing to protect against heat and flame

Page: 99



## BS EN 13034

Protective clothing against liquid chemicals

Page: 100



## BS EN 342

Protective clothing - protection against cold

Page: 100



## BS EN 14404

Personal protective equipment, knee protectors for work in the kneeling position

Page: 101



## BS EN 343

Protective clothing - protection against rain

Page: 101

# ARC FLASH PROTECTION IEC 61482 EXPLAINED



## IEC 61482-2: 2018

LIVE WORKING - PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF AN ELECTRIC ARC

This standard is significantly different to FR standard EN ISO 11612. It includes more rigorous and different requirements, and is the standard for garments to protect those at risk of arc flash. The latest update to the standard was in 2018 and contained a couple of important changes to the test methods with regards to the performance ratings of garments.

## SCOPE (EXTRACT FROM THE INTERNATIONAL STANDARD)

This part of IEC 61482 is applicable to protective clothing used in work where there is the risk of exposure to an electric arc hazard.

This standard specifies requirements and test methods applicable to materials and garments for protective clothing for electrical workers against the thermal hazards of an electric arc based on:

- Relevant general properties of the textiles, tested with selected textile test methods
- Arc thermal resistance properties

## TEST METHODS

There are two test methods commonly referred to under the IEC 61482-2: 2018 European Standards:

ProGARM garments are tested using both methods.

### OPEN ARC TEST METHOD: IEC 61482-1-1

This test method gives a Calorific Value (cal/cm<sup>2</sup>) for each garment - expressed as an arc thermal protection value (ATPV), breakopen threshold energy value (EBT) or the incident energy limit (ELIM) and in this way, layered garment systems can be built up with testing results that correspond directly to your arc flash Risk Assessments.

### BOX TEST METHOD: IEC 61482-1-2

This test method gives results of either 4kA (APC 1) or 7kA (APC 2) with APC 2 being a higher level of protection and is established in the European market. Garments in the ProGARM® collection do get APC/Class ratings, but the results cannot be directly related to arc flash Risk Assessments in the same way that calorific values can be in the Open Arc Test Method.

## CALORIFIC VALUES EXPLAINED

There are now 3 different calorific values given to a garment when it undergoes Open Arc Test Method: IEC 61482-1-1: 2019

### ATPV

The maximum thermal energy the garment can withstand before the wearer would have a **50% probability of 2nd degree burns.**

### EBT50

The value of incident energy at which **breakopen occurs with 50% probability.**

### ELIM

The maximum thermal energy the garment can withstand with the wearer having a **0% probability of 2nd degree burns.**

FOR MORE INFORMATION ON ARC FLASH TEST METHODS CALL US ON 01482 679600

# PROTECTION IN LAYERS

## LAYERED PROTECTION WITH PROGARM®

When arc flash and flame resistant garments are worn in layers, they provide the best "last line of defence against an arc flash incident."

Arc flash garments should not just be an outer protective layer, as wearing the wrong fabrics even under protective garments can result in injury in the event of an arc flash incident. That's why ProGARM® has developed a total range of garments to protect you and your team that are soft, breathable and comfortable.

By layering garments, you can achieve enhanced protection values, higher than merely the sum of the protection values of the garments. This is because air is a poor conductor of heat. It acts as an insulator and so increases the total calorific value of the garment system.

## ARC RATED CATEGORIES

An arc rated category number is a method to determine the required arc rating of a garment worn for a given work task. Some work tasks will demand wearing protective garments in multiple layers to reach the required level of arc protection, and this information should be provided by an employer as a result of an arc flash assessment.

The NFPA identified four arc risk category levels, which are numbered by severity from 1 to 4 (1 being the lowest). The arc category is the level of arc flash protective clothing you must wear to protect against a minimum level of incident energy measured in calories/cm<sup>2</sup>.

This means that electrical equipment, depending upon the energy delivering capability, under fault conditions can cause an explosion, or arc fault of a certain level, again measured in calories/cm<sup>2</sup>. The resulting explosion is able to deliver an amount of heat to a certain distance.

Please note that references within this catalogue to ARC 1 to 4 relate to ATPV/EBT ratings.

ProGARM®  
5280 POLO SHIRT AND  
5282 POLO SHIRT

ARC1  
7 cal



+

ProGARM®  
5630 SWEATSHIRT

ARC2  
14 cal



=

ARC3  
31 cal

We have undertaken a number of tests of combinations of popular garments. Any questions, please contact sales@progarm.com

Combination	Box Test Result	Open Arc Result
5280 Polo shirt + 5630 Sweatshirt	Garment & Fabric Class 2	Garment & Fabric 31cal (Category 3)
6458/6100/6101/7480/7482 Coverall + 5850 Jacket	Fabrics (Class 2)	Garment & Fabric 25.6cal (Category 3)
6458/6100/6101/7480/7482 Coverall + 7638/7636/7418/7414 Trousers	Fabrics (Class 2)	Garment & Fabric 25.6cal (Category 3)
6458/6100/6101/7480/7482 Coverall + 5200 Polo shirt	-	Garment & Fabric 28.5cal (Category 3)

# THE UK'S FIRST ARC FLASH SURVEY

Together with the British Safety Industry Federation (BSIF), ProGARM® commissioned a study into electrical safety across the UK in a bid to shine a spotlight on the potentially life-changing and fatal risks of arc flash.


Alarmingly, it reveals a lack of awareness at every level of current safety standards governing arc flash and an apparent failure from employers to properly educate staff about this high-risk threat.

We commissioned the survey to help us better support our customers and their industries in adopting health and safety best practice, and sought the views from 200 UK industry professionals across the rail, power generation, industrial electrical, utilities and petrochemical sectors.

It is thought to be the first national research exercise of its type ever conducted into arc flash, and gathered feedback from site-based employees as well as senior management teams/employers.

**57%**  
ADMITTED THAT THEY (OR SOMEONE THEY WORK WITH) HAVE SUFFERED AN ARC FLASH STRIKE

IN AN ORGANISATION, WHO IS RESPONSIBLE FOR MINIMISING THE RISK OF AN ARK FLASH STRIKE OCCURRING?

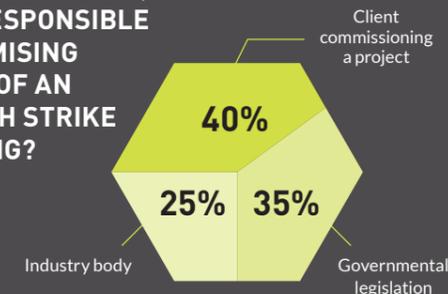

**80%**  
BELIEVE EXISTING GOVERNMENT LEGISLATION IS TOO AMBIGUOUS

**50%**  
CONSIDER IT TO BE THE EMPLOYEE'S RESPONSIBILITY TO SELF-EDUCATE ON ARC FLASH

**84%**  
CLAIMED THEY UNDERSTAND THE RISKS ASSOCIATED WITH ARC FLASH

**90%**  
believe that there is a pressing need for the Government to develop more specific guidelines and legislation surrounding arc flash

**78%**  
OF RESPONDENTS DID NOT KNOW THE CORRECT GOVERNMENT SAFETY GUIDANCE HSG47 - FOR AVOIDING UNDERGROUND SERVICES WHEN BREAKING GROUND



**VXS+**  
INHERENT™  
100%  
INHERENT

**ProGARM**  
PROTECTING LIVES

# SINGLE COLOUR COLLECTION

For full Product Matrix outlining EN Standards, see page 102

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

Colourfast with less than 3% washing shrinkage\*

\*Only applicable for woven fabrics



**5200 POLO SHIRT**

Page 20



**5280 POLO SHIRT**

Page 21



**5630 SWEATSHIRT**

Page 22



**5530 HOODIE**

Page 23



**5430 T-SHIRT**

Page 24



**9931 SOFTSHELL JACKET**

Page 25



**5850 JACKET**

Page 26



**5790 LINED FLEECE**

Page 26



**7638 TROUSER**

Page 27



**7720 COMBAT TROUSER & 7721 DETACHABLE POCKET**

Page 28



**6100 COVERALL**

Page 29



5200

# POLO SHIRT

SIZES: S-4XL

IMPROVED

Colour matched to other navy ProGARM® garments



Enclosed stud placket allows quick fastening

Rib knit cuffs



Natural feel, comfortable and soft

5202

# LADIES POLO SHIRT

SIZES: 8-16



Cut in a specific women's fit

5280

# POLO SHIRT

SIZES: S-4XL

Colour matched to other navy ProGARM® garments



ThermSAFE™ plastic FR poppers

SafetyICON™ on arm



5282

# LADIES POLO SHIRT

SIZES: 8-16



Cut in a specific women's fit

- ✓ Enclosed stud placket // Allows quick fastening
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable // Good moisture management
- ✓ ThermSAFE™ plastic FR poppers // CE Certified
- ✓ Knitted collar with tipping // Ensures best appearance after washing
- ✓ Rib knit cuffs // Close fit
- ✓ Colour matched to other navy ProGARM® garments // Best appearance
- ✓ SafetyICON™ on arm // Visual EN Standard icon system

### PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** ProGARM® VXS+ Inherent Interlock Fabric, Navy - 260gms  
**LOI:** 31.2%  
**PRODUCT CARE:**

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
A1, B1, C1, F1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1 EBT50= 14.2cal/cm²

### BOX TEST

4KA	14.2CAL
CLASS 1	ARC 2

### ARC RATING



- ✓ Enclosed stud placket // Allows quick fastening
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable // Good moisture management
- ✓ ThermSAFE™ plastic FR poppers // CE Certified
- ✓ Knitted collar with tipping // Ensures best appearance after washing
- ✓ Rib knit cuffs // Close fit
- ✓ SafetyICON™ on arm // Visual EN Standard icon system

### PROTECTION IN LAYERS

5280 or 5282 Polo Shirt + 5630 Sweatshirt = ARC 3 protection with 31.0cal/cm²

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
A1, B1, C1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1 ATPV= 7cal/cm²

### BOX TEST

4KA	7CAL
CLASS 1	ARC 1

### ARC RATING



### PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** ProGARM® VXS+ Inherent Pique Fabric, Navy - 210gms  
**LOI:** 34.3%  
**PRODUCT CARE:**

SINGLE COLOUR COLLECTION

Round neck collar with stretch rib



Useful arm pocket



SafetyICON™ EN Standard identification

PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** ProGARM® VXS+ Inherent Sweat Fabric, Navy - 320gms  
**LOI:** 30.8%  
**PRODUCT CARE:**

5630

# SWEATSHIRT

SIZES: S-4XL

- ✓ Brushed fleece inner // Winter warmth
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable // Good moisture management
- ✓ Round neck collar with stretch rib // Smart appearance
- ✓ 5cm stretch rib hem // Best fit around waist
- ✓ Rib knit cuffs // Close fit
- ✓ Colour matched to other navy ProGARM® garments // Best appearance
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ Arm pocket // Useful pocket for phone or small items

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
 EN ISO 11612: 2015 A1, B1, C1	 EN 1149-5: 2008 Pl. 5:2008 Pl. 3:2004 Charge Decay	 IEC 61482-2: 2009 Class 1 EBT50=14.4cal/cm²	

 4KA CLASS 1	 14.4CAL ARC 2
--------------------	----------------------

PROTECTION IN LAYERS

5280 or 5282 Polo Shirt + 5630 Sweatshirt = ARC 3 protection with 31.0cal/cm²

SINGLE COLOUR COLLECTION

Drawstring hood with warm neck design



SafetyICON™ EN Standard identification



Front pockets for small items



PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** ProGARM® VXS+ Inherent Sweat Fabric, Navy - 320gms  
**LOI:** 30.8%  
**PRODUCT CARE:**

5530

# HOODIE

SIZES: S-4XL

- ✓ Brushed fleece inner // Winter warmth
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable with good moisture management
- ✓ Round neck higher collar // Additional warmth
- ✓ 5cm stretch rib hem // Best fit around waist and cuffs
- ✓ Rib knit cuffs // Close fit
- ✓ Colour matched to other navy ProGARM® garments // Best appearance
- ✓ SafetyICON™ on arm // Visual EN Norm icon system
- ✓ Front pockets // Useful for phone or small items

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
 EN ISO 11612: 2015 A1, B1, C1, F1	 EN 1149-5: 2018 Pl. 5:2008 Pl. 3:2004 Charge Decay	 IEC 61482-2: 2018 EBT50=13.2 Cal/cm² APC 1	 IEC 61482-2: 2018 ELIM=12 Cal/cm²

 4KA CLASS 1	 13.2CAL ARC 2
--------------------	----------------------

PROTECTION IN LAYERS

5280 or 5282 Polo Shirt + 5530 Hoodie = ARC 3 protection with 31.0cal/cm²

Round neck rib knit collar



Colour matched to other navy ProGARM® garments



Open cuffs for a relaxed fit



5430

# T-SHIRT

SIZES: S-4XL

### PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** ProGARM® VXS+ Inherent Jersey Fabric, Navy - 200gms  
**PRODUCT CARE:**

- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable // Good moisture management
- ✓ Generous length // Maximum protection

- ✓ Colour matched to other navy ProGARM® garments // Best appearance
- ✓ SafetyICON™ on arm // Visual EN Standard icon system

EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
A1, B1, C1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 1

BOX TEST



ARC RATING



FABRIC



Zipped Napoleon pocket with integrated phone pocket



Microfleece lining for extra warmth



Radio loop on left breast



IMPROVED

### PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** VXS+ Inherent Woven Weave Fabric with Waterproof Membrane - 340gms  
**PRODUCT CARE:**

9931

# SOFTSHELL JACKET

SIZES: S-4XL

- ✓ Elasticated inner cuffs // Wind proofing
- ✓ Velcro® fastening tabs on cuffs and back // Improved fit
- ✓ Zipped Napoleon pocket on left breast with incorporated phone pocket // Safe and secure
- ✓ Inner pockets on right breast // Storage space
- ✓ Covered, zipped hand pockets // Keeps out debris and keeps contents secure

- ✓ Mandarin collar // Maximum neck protection
- ✓ Microfleece lining // Warmth and comfort
- ✓ Easy Stretch side panels // Extra comfort
- ✓ Extended back // Protection when bending over
- ✓ SafetyICON™ on arm // Visual EN standard
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ ThermSAFE™ two-way plastic FR zipper // Flexibility

EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
A1, B1, C1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 2 ATPV+ 28cal/cm²

BOX TEST



ARC RATING



FABRIC





5850

# JACKET

SIZES: S-4XL

- ✓ Mandarin collar // Maximum neck protection
- ✓ One front pocket with zippers // Secure storage
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ 5cm FR AS reflective tape // Double stitched for longer life
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets with flaps // Prevents entry of debris
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extended back // Protection when bending over
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wearer comfort

## PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ 250W 250g/m<sup>2</sup> Woven Inherent Fabric  
**LOI:** 30.6%  
**PRODUCT CARE:**

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
EN ISO 11612: 2015	4KA	9.5CAL	VXS+ INHERENT™
EN 1149-5: 2008	CLASS 1	ARC 2	
IEC 61482-2: 2009			
EN ISO 11611: 2015			
Pl. 5:2008 Pl. 3:2004 Charge Decay			
Class 1 EBT50=9.5cal/cm <sup>2</sup>			
Class 1, A1			

5790

# LINED FLEECE

SIZES: S-4XL

- ✓ Mandarin collar // Maximum neck protection
- ✓ Two front pockets with zippers // Secure storage
- ✓ Internal pocket // Secure Velcro® tab
- ✓ Fully lined // Extra warmth & protection
- ✓ Drawcord waist adjustment with toggles // Close waist fit
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ Elasticated cuff // Close fit around wrist
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extended back // Protection when bending over

## PRODUCT INFORMATION


**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 Outer Layer: VXS+ 310F 300g/m<sup>2</sup> Fleece Inherent Fabric  
 Lining: VXS+ 230C 230g/m<sup>2</sup> Woven Fabric  
**PRODUCT CARE:**

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
EN ISO 11612: 2015	4KA	32.3CAL	VXS+ INHERENT™
EN 1149-5: 2008	CLASS 1	ARC 3	
IEC 61482-2: 2009			
EN ISO 11611: 2015			
Pl. 5:2008 Pl. 3:2004 Charge Decay			
Class 1 EBT50=32.3cal/cm <sup>2</sup>			
A1, B1, C1			

7638

# TROUSER

**SIZES:**  
 30"- 52" Reg leg (32"/81cm)  
 32"- 44" Tall leg (34"/86cm)  
 30"- 42" Short leg (30"/76cm)



Extra wide belt loop at rear



Triple needle stitch seams for extra longevity



Kneepad pockets for extra protection



7636

# LADIES TROUSERS

**SIZES:**  
 8-16 Reg leg (30"/76cm)



Cut in a specific women's fit

## PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ 250W 250g/m<sup>2</sup> Woven Inherent Fabric  
**LOI:** 30.6%  
**PRODUCT CARE:**

- ✓ Combat pocket with flap // Safe storage space
- ✓ Mobile phone pocket // Keep your phone safe
- ✓ Side access pockets // Traditional style
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Standard icon system
- ✓ Rear pockets with flap // Secure storage space
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Reinforced crotch // Improved longevity
- ✓ ThermSAFE™ jeans button // Jeans style fastening

## EN STANDARDS

EN ISO 11611: 2015	EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
Class 1, A1	A1, B1, C1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 1 EBT50=9.5cal/cm <sup>2</sup>

## BOX TEST

4KA
CLASS 1

## ARC RATING

9.5CAL
ARC 2



# 7720

## COMBAT TROUSER

**SIZES:**  
 30" - 52" Reg leg (31"/80cm)  
 32" - 44" Tall leg (33"/85cm)  
 32" - 42" Short leg (30"/76cm)



# 7721

## DETACHABLE HOLSTER POCKET

**SIZES:** One Size



Order Separately

# 6100

## COVERALL

**SIZES:**  
 S-4XL Reg leg (31"/80cm)  
 M-2XL Tall leg (33"/85cm)  
 Short leg by re-hemming



# 6101

## LADIES COVERALL

**SIZES:**  
 8-16 Reg leg (29"/75cm)



- ✓ Combat pocket with flap // Safe storage space
- ✓ External kneepad pockets // Wear with ProGARM® 2240 kneepads for extra protection
- ✓ Mobile phone pocket // Keeps your phone safe
- ✓ Side access pockets // Additional storage
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Standard icon system
- ✓ Reinforced crotch // Improved longevity
- ✓ Reinforced long hem // Stronger leg hem, ability to extend/shorten leg
- ✓ ThermSAFE™ jeans button // Jeans style fastening

### PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ Woven Inherent Fabric,  
 300gms  
**PRODUCT CARE:**

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
Class 1, A1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1 EBT50= 12.8cal/cm²

### BOX TEST ARC RATING FABRIC

4KA	12.8CAL	VXS+ INHERENT™
CLASS 1	ARC 2	

### EN STANDARDS

EN ISO 11611: 2015	EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009
Class 1, A1	A1, B1, C1, F1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1 EBT50= 9.5cal/cm²

### BOX TEST ARC RATING FABRIC

4KA	9.5CAL	VXS+ INHERENT™
CLASS 1	ARC 2	

- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Chest pockets with zippers // Secure storage
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Side access pockets // With access inside the coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort
- ✓ Action back for improved comfort

### PRODUCT INFORMATION

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ 250W 250g/m²  
 Woven Inherent Fabric  
**LOI:** 30.6%  
**PRODUCT CARE:**

# TWO TONE COLOUR COLLECTION

For full Product Matrix outlining EN Standards, see page 102

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

Colourfast with less than 3% washing shrinkage\*

\*Only applicable for woven fabrics



**5808 JACKET**

Page 32



**5816 TROUSER**

Page 33



**5805 HI-VIS JACKET**

Page 34



**5815 HI-VIS TROUSER**

Page 35



**7715 HI-VIS COMBAT TROUSER**

Page 36



**7522 HI-VIS DUNGAREE**

Page 37



**6458 COVERALL**

Page 38



**6444 COVERALL**

Page 39



**6460 COVERALL**

Page 40



**4658 COVERALL**

Page 41





Double stitched reflective tape on HV yellow shoulder

Secure gas monitor loop

Adjustable waist fastening for improved fit

IMPROVED

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:** VXS+ 300W 300g/m2 Woven Inherent Fabric with FC Finish  
**LOI:** 29.3%  
**PRODUCT CARE:**

5808

# JACKET

**SIZES:** S-4XL

- ✓ Mandarin collar // Maximum neck protection
- ✓ Two front pockets with zippers // Secure storage
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ 5cm FR AS reflective tape // Double stitched for longer life
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Extended back // Protection when bending over
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort

EN STANDARDS				
EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2009	EN ISO 11611: 2015	EN 13034:2005 +A1:2009
A1, B1, C1, D1, E1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 1 EBT50= 12cal/cm²	Class 1, A1	Part 6

BOX TEST	ARC RATING	FABRIC
4KA	12CAL	
<b>CLASS 1</b>	<b>ARC 2</b>	

5816

# TROUSER

**SIZES:**  
 30"- 52" Reg leg (32"/81cm)  
 32"- 44" Tall leg (34"/86cm)  
 30"- 42" Short leg (30"/76cm)

IMPROVED



LIFETIME SEAM GUARANTEE

Side pockets with flaps to prevent debris

Triple needle stitch seams for extra longevity

Internal kneepad pocket to fit ProGARM™ 2240 Kneepad

- ✓ 5cm FR AS reflective tape // Double stitched for longer life
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Combat pocket with flap // Safe storage space
- ✓ Mobile phone pocket // Keep your phone safe
- ✓ Side access pockets with flaps // Protects from debris entry
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Standard icon system
- ✓ Two rear pockets with flaps // Secure storage space
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Reinforced crotch // Improved longevity
- ✓ ThermSAFE™ jeans button // Jeans style fastening

EN STANDARDS				
EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2009	EN ISO 11611: 2015	EN 13034:2005 +A1:2009
A1, B1, C1, D1, E1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 1 EBT50= 12cal/cm²	Class 1, A1	Part 6

BOX TEST	ARC RATING
4KA	12CAL
<b>CLASS 1</b>	<b>ARC 2</b>

5814

# LADIES TROUSER

**SIZES:**  
 8-16 Reg leg (30"/76cm)



IMPROVED

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:** VXS+ 300W 300g/m2 Woven Inherent Fabric with FC Finish  
**LOI:** 29.3%  
**PRODUCT CARE:**

**NEW** **LIFETIME SEAM GUARANTEE** **VXS+ INHERENT™**

Heat applied reflective tape tested to meet industrial wash standards

Dual gas monitor/radio loops on chest

Adjustable waist fastening for improved fit

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:** VXS+ 300W 300g/m2 Woven Inherent Fabric with FC Finish  
**LOI:** 29.3%  
**PRODUCT CARE:**

# 5805 HI-VIS JACKET

SIZES: S-4XL

- ✓ Mandarin collar // Maximum neck protection
- ✓ Extended back // Protection when bending over
- ✓ Adjustable waist tabs // Creates a good fit
- ✓ Adjustable wrist tabs // Provides a snug fit over gloves and protection
- ✓ Two front chest bellows pockets with flaps // Secure storage
- ✓ Side access pockets with zips // For hands and secure storage
- ✓ Phone and pen pocket on sleeve with flap // Safe and secure
- ✓ 5cm and 7cm FR AS reflective tape, industrial wash // Heated applied, moves with the garment
- ✓ ThermSAFE™ plastic FR zipper and components // CE Certified
- ✓ SafetyICON™ on arm // Visual EN Norm icon system
- ✓ Triple stitched side seams // Lifetime seam guarantee for confidence
- ✓ 2 x gas monitor and/or radio loops // Secure fixing points

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
EN ISO 11612: 2015 A1, B1, C1, D1, E1, F1	EN 1149-5: 2018 Pt. 5:2008 Pt. 3:2004 Charge Decay	IEC 61482-2: 2018 Class 1 EBT50=12cal/cm²	EN ISO 11611: 2015 Class 1, A1
EN ISO 20471: 2013 Class 2			EN ISO 13034:2005 +A1:2009 Part 6

**4KA** **12CAL**

**CLASS 1** **ARC 2**

**VXS+ INHERENT™**

# 5815 HI-VIS TROUSER

**SIZES:**  
 30"- 52" Reg leg (32"/81cm)  
 32"- 44" Tall leg (34"/86cm)  
 30"- 42" Short leg (30"/76cm)

**NEW** **LIFETIME SEAM GUARANTEE** **VXS+ INHERENT™**

Triple needle stitched structural seams have a Lifetime Seam Guarantee

Combat pockets with flaps for secure storage

External kneepad pockets to fit ProGARM™ 2240 Kneepad

- ✓ 5cm and 7cm FR AS reflective tape, industrial wash // Heated applied, moves with the garment
- ✓ External kneepad pockets // For extra comfort and knee protection
- ✓ 2 x combat pockets with flaps // Safe storage space
- ✓ Mobile phone pocket on leg // Keep your phone safe
- ✓ Side access pockets // For easy access storage
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper and jeans button // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Norm icon system
- ✓ Two rear pockets with flaps // Secure storage space
- ✓ Triple stitched structural seams // Lifetime quality assurance
- ✓ Reinforced crotch // Improves garment durability

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
EN ISO 11612: 2015 A1, B1, C1, D1, E1, F1	EN 1149-5: 2018 Pt. 5:2008 Pt. 3:2004 Charge Decay	IEC 61482-2: 2018 Class 1 EBT50=12cal/cm²	EN ISO 11611: 2015 Class 1, A1
EN ISO 20471: 2013 Class 1			EN ISO 13034:2005 +A1:2009 Part 6

**4KA** **12CAL**

**CLASS 1** **ARC 2**

**VXS+ INHERENT™**

# 5810 LADIES HI-VIS TROUSER

**SIZES:**  
 8-16 Reg leg (30"/76cm)



**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:** VXS+ 300W 300g/m2 Woven Inherent Fabric with FC Finish  
**LOI:** 29.3%  
**PRODUCT CARE:**



Triple needle stitched structural seams have a Lifetime Seam Guarantee



Combat pockets with flaps for secure storage



External kneepad pockets to fit ProGARM™ 2240 Kneepad

PRODUCT INFORMATION

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:** VXS+ 300W 300g/m2 Woven Inherent Fabric, VXS+ 300W 300g/m2 Woven Ripstop Fabric  
**PRODUCT CARE:**

7715

# HI-VIS COMBAT TROUSER

**SIZES:** 30" - 52" Reg leg (32"/81cm)  
 32" - 44" Tall leg (34"/86cm)  
 30" - 42" Short leg (30"/76cm)

- ✓ 5cm and 7cm FR AS industrial wash reflective tape // Stitched on for durability
- ✓ External kneepad pockets // For extra comfort and knee protection
- ✓ Cordura® knee & hem reinforcement // Up to 200,000 abrasion cycles
- ✓ Combat pocket with flap // Safe storage space for phone
- ✓ Open tool/pen pocket on leg // Easy access/storage for tools
- ✓ Two rear pockets with flaps // Secure storage space
- ✓ Side access pockets // For easy access storage
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper and jeans button // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Norm icon system
- ✓ Triple stitched structural seams // Lifetime quality assurance
- ✓ Reinforced crotch // Improves garment durability

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
 EN ISO 11612: 2015 A1, B1, C1, F1	 EN 1149-5: 2018 Pl. 5:2008 ATPV = Charge Decay	 BS EN 61482-2: 2020 APC 1 ATPV = 12cal/cm²	 BS EN 61482-2: 2020 ELIM = 9cal/cm²
 EN ISO 20471: 2013 Class 1	 4KA CLASS 1	 12CAL ARC 2	 VXS+ INHERENT™



Triple needle stitched structural seams have a Lifetime Seam Guarantee



Combat pockets with flaps for secure storage



External kneepad pockets to fit ProGARM™ 2240 Kneepad

PRODUCT INFORMATION

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:** VXS+ 300W 300g/m2 Woven Inherent Fabric, VXS+ 300W 300g/m2 Woven Ripstop Fabric  
**PRODUCT CARE:**

7522

# HI-VIS DUNGAREE

**SIZES:** 30" - 52" Reg leg (32"/81cm)  
 32" - 44" Tall leg (34"/86cm)  
 30" - 42" Short leg (30"/76cm)

- ✓ Cordura® knee & hem reinforcement // Up to 200,000 abrasion cycles
- ✓ 5cm and 7cm FR AS industrial wash reflective tape // Stitched on for durability
- ✓ External kneepad pockets // For extra comfort and knee protection
- ✓ Open tool/pen pocket on leg // Easy access to tools
- ✓ Combat pocket with flap // Safe storage space for phone
- ✓ Two rear pockets with flaps // Secure storage space
- ✓ Side access pockets // For easy access storage
- ✓ Large chest pocket with flap // Safely stores mobile phone
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ Adjustable braces attached to bib rear // Provides comfort-fit
- ✓ ThermSAFE™ plastic FR zipper and brace buttons // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Norm icon system
- ✓ Triple stitched structural seams // Lifetime quality

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
 EN ISO 11612: 2015 A1, B1, C1, F1	 EN 1149-5: 2018 Pl. 5:2008 ATPV = Charge Decay	 BS EN 61482-2: 2020 APC 1 ATPV = 12cal/cm²	 BS EN 61482-2: 2020 ELIM = 9cal/cm²
 EN ISO 20471: 2013 Class 1	 4KA CLASS 1	 12CAL ARC 2	 VXS+ INHERENT™

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
 EN ISO 11612: 2015 A1, B1, C1, F1	 EN 1149-5: 2018 Pl. 5:2008 ATPV = Charge Decay	 BS EN 61482-2: 2020 APC 1 ATPV = 12cal/cm²	 BS EN 61482-2: 2020 ELIM = 9cal/cm²
 EN ISO 20471: 2013 Class 1	 4KA CLASS 1	 12CAL ARC 2	 VXS+ INHERENT™



6458

# COVERALL

**SIZES:** S-4XL Reg leg (31"/80cm)  
M-2XL Tall leg (33"/85cm)

- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Expandable ankle opening with zippers // Easy removal
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ 5cm heat applied reflective tape // Lighter weight
- ✓ Combat pocket on leg plus sleeve pocket // Ample space
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wearer comfort

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
EN ISO 11612: 2015 A1, B1, C1, F1	EN 1149-5: 2008 Pt. 5:2008 Pt. 3:2004 Charge Decay	IEC 61482-2: 2009 Class 1 EBT50= 9.5cal/cm²	EN ISO 11611: 2015 Class 1, A1
EN ISO 20471: 2013 Class 3			

BOX TEST	ARC RATING	FABRIC
4KA <b>CLASS 1</b>	9.5CAL <b>ARC 2</b>	

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:**  
VXS+ 240W 240g/m² Woven  
Inherent Fabric  
**LOI:** 30.6%  
**PRODUCT CARE:**

6444

# COVERALL

**SIZES:**  
S-4XL Reg leg (31"/80cm)  
M-2XL Tall leg (33"/85cm)



IMPROVED

- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Chest pockets with zippers // Secure storage
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ 5cm FR AS reflective tape // Double stitched for longer life
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort
- ✓ Action back for improved comfort

EN STANDARDS	BOX TEST	ARC RATING	FABRIC
EN ISO 11612: 2015 A1, B1, C1, D1, E1, F1	EN 1149-5: 2008 Pt. 5:2008 Pt. 3:2004 Charge Decay	IEC 61482-2: 2009 Class 1 EBT50= 12cal/cm²	EN ISO 11611: 2015 Class 1, A1
EN ISO 20471: 2013 Class 3			

BOX TEST	ARC RATING	FABRIC
4KA <b>CLASS 1</b>	12CAL <b>ARC 2</b>	

\*6446 meets Class 2 and 6444 meets Class 3

6446

# LADIES COVERALL

**SIZES:**  
8-16 Reg leg (76cm)



IMPROVED

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow  
**FABRIC SPECIFICATION:**  
VXS+ 300W 300g/m² Woven  
Inherent Fabric with FC Finish  
**LOI:** 29.3%  
**PRODUCT CARE:**

**6460**

# COVERALL

**SIZES:** S-4XL Reg leg (31"/80cm)  
M-2XL Tall leg (33"/85cm)

**IMPROVED**

Vertical chest pockets for use with harnesses

Internal elasticated waistband for improved fit

Combat pocket on right leg with phone pocket

**LIFETIME SEAM GUARANTEE**

**VXS+ INHERENT™**

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Yellow

**FABRIC SPECIFICATION:**  
VXS+ 160W 160g/m2 Woven Inherent Fabric

**PRODUCT CARE:**

- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra comfort
- ✓ Vertical zip chest pockets // Accessible when wearing a harness
- ✓ Expandable ankle opening with zippers // Easy removal
- ✓ SafetyICON™ on arm // Visual EN Norm icon system
- ✓ 5cm heat applied reflective tape // Lighter weight
- ✓ Combat pocket on leg plus sleeve pocket // Ample space
- ✓ Cuff tabs with Velcro® brand fasteners // Close fit around
- ✓ Side access pockets // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort

EN STANDARDS			
EN ISO 11612: 2015	EN 1149-5: 2018	EN ISO 20471: 2013	IEC 61482-2: 2018
A1, B1, C1, F1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 3	APC1 ELIM=5cal/cm² EBT50=5.8cal/cm²

BOX TEST	ARC RATING	FABRIC
4KA	5CAL	<b>VXS+ INHERENT™</b>
<b>CLASS 1</b>	<b>ARC 1</b>	

**4658**

# COVERALL

**SIZES:**  
S-4XL Reg leg (31"/80cm)  
M-2XL Tall leg (33"/85cm)

**IMPROVED**

Adjustable cuff with ThermSAFE™ fastening

Chest pockets with zippers for secure storage

ThermSAFE™ plastic FR zippers



- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra comfort
- ✓ Vertical zip chest pockets // Accessible when wearing a harness
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Norm icon system
- ✓ 5cm heat applied reflective tape // Lighter weight
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets with flaps // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort
- ✓ Combat pocket on leg plus sleeve pocket // Ample space
- ✓ Expandable ankle opening with zippers // Easy removal

**PRODUCT INFORMATION**

**COLOUR:** Navy/HV Orange

**FABRIC SPECIFICATION:**  
ProGARM VXS+ Inherent Woven Fabric, HV Orange - 290gms  
ProGARM VXS+ Inherent Woven Fabric, Navy - 240gms

**PRODUCT CARE:**

EN STANDARDS					
EN ISO 11612: 2015	EN ISO 20471: 2013	IEC 61482-2: 2018	Compliant RIS 3279	EN ISO 11611: 2015	EN 1149-5: 2018
A1, B1, C1, F1	Class 3	ATPV = 8cal/cm² APC 1	Issue 1	Class 1, A1	Pt. 5:2008 Pt. 3:2004 Charge Decay

BOX TEST	ARC RATING	FABRIC
4KA	8CAL	<b>VXS+ INHERENT™</b>
<b>CLASS 1</b>	<b>ARC 2</b>	



**VXS+**  
INHERENT™

100%  
INHERENT

**ProGARM**<sup>®</sup>  
PROTECTING LIVES

# HI VIS YELLOW COLLECTION

For full Product Matrix outlining EN Standards, see page 102

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

Colourfast with less than 3% washing shrinkage\*

\*Only applicable for woven fabrics



**5286 POLO SHIRT**

Page 44



**5626 SWEATSHIRT**

Page 45



**9930 SOFTSHELL JACKET**

Page 46



**7418 TROUSER**

Page 47



**9750 WATERPROOF JACKET**

Page 48



**9880 WATERPROOF SALOPETTES**

Page 49



**7480 COVERALL**

Page 50



**9720 LIGHTWEIGHT WATERPROOF JACKET**

Page 51



**9820 LIGHTWEIGHT WATERPROOF SALOPETTES**

Page 52



5286

# POLO SHIRT

SIZES: S-4XL



- ✓ Enclosed stud placket // Allows quick fastening
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable // Good moisture management
- ✓ ThermSAFE™ plastic FR poppers // CE Certified
- ✓ Knitted collar with tipping // Ensures best appearance after washing
- ✓ Contrast colour collar // Stylish and practical
- ✓ Rib knit cuffs // Close fit
- ✓ SafetyICON™ on arm // Visual EN Standards icon system
- ✓ 5cm FR AS reflective tape // Heat applied to improve flexibility

EN STANDARDS			
EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2018	EN ISO 20471: 2013
A1, B1, C1, F1	Pt. 5:2008 Pt. 3:2004 Charge Decay	ELIM = 5.6cal/cm² ATPV = 6.2cal/cm² APC 1	Class 3

BOX TEST FABRIC

**4KA**

**CLASS 1**

**VXS+ INHERENT™**

\*5287 meets Class 2 and 5286 meets Class 3

5287

# LADIES POLO SHIRT

SIZES: 8-16



### PRODUCT INFORMATION

**COLOUR:** HV Yellow  
**FABRIC SPECIFICATION:**  
 ProGARM® VXS+ Inherent Pique Fabric, HV Yellow - 210gms  
**PRODUCT CARE:**

# SWEATSHIRT

SIZES: S-4XL

5626



- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable // Good moisture management
- ✓ Rib knit cuffs // Close fit
- ✓ SafetyICON™ on arm // Visual EN Standards icon system
- ✓ 5cm FR AS reflective tape // Heat applied to improve flexibility
- ✓ Brushed fleece inner // Winter warmth
- ✓ Round neck collar with stretch rib // Smart appearance
- ✓ 5cm stretch rib hem // Best fit around the waist
- ✓ Arm pocket // Useful pocket for phone or small items

EN STANDARDS			
EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009	EN ISO 20471: 2013
A1, B1, C1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1 EBT50 = 13.2cal/cm²	Class 3

BOX TEST ARC RATING FABRIC

**4KA**

**13.2CAL**

**CLASS 1**

**ARC 2**

**VXS+ INHERENT™**

### PRODUCT INFORMATION

**COLOUR:** HV Yellow  
**FABRIC SPECIFICATION:**  
 ProGARM® VXS+ Inherent Sweat Fabric, HV Yellow - 320gms  
**LOI:** 30.8%  
**PRODUCT CARE:**



9930

# SOFTSHELL JACKET

SIZES: S-4XL

- ✓ Two tone design // Practical and stylish
- ✓ Elasticated inner cuffs // Wind proofing
- ✓ Velcro® fastening tabs on cuffs and back // Improved fit
- ✓ Radio loop attaching point on left breast
- ✓ Zipped Napoleon pocket on left breast with incorporated phone pocket // Safe and secure
- ✓ Inner pockets on right hand breast // Storage space
- ✓ Covered, zipped hand pockets // Keeps out debris and keeps contents secure
- ✓ Mandarin collar // Maximum neck protection
- ✓ 50mm double stitched reflective tape // Increased durability
- ✓ Microfleece lining // Warmth and comfort
- ✓ Easy Stretch side panels // Wearer comfort
- ✓ Extended back // Protection when bending over
- ✓ SafetyICON™ on arm // Visual EN Standards
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ ThermSAFE™ two-way plastic FR zipper // Flexibility

EN STANDARDS			
EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009	EN ISO 20471: 2013
A1, B1, C1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 2 EBT50=28cal/cm²	Class 3 excludes Clause 5.6

BOX TEST	ARC RATING	FABRIC
7KA	28CAL	VXS+ INHERENT™
CLASS 2	ARC 3	

### PRODUCT INFORMATION

**COLOUR:** HV Yellow / Navy  
**FABRIC SPECIFICATION:**  
 VXS+ Inherent Woven Weave  
 Fabric with Waterproof Membrane—340gms  
**PRODUCT CARE:**

7418

# TROUSER

**SIZES:** 30" - 52" Reg leg (31"/80cm)  
 32" - 44" Tall leg (33"/85cm)  
 30" - 42" Short leg (30"/76cm)



- ✓ Combat pocket with flap // Safe storage space
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Mobile phone pocket // Keeps your phone safe
- ✓ Side access pockets with flaps // Protects from debris entry
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Standards icon system
- ✓ Rear pockets with flap // Secure storage space
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Reinforced crotch // Improved longevity
- ✓ ThermSAFE™ jeans button // Jeans style fastening

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2008	IEC 61482-2: 2009	EN ISO 11611: 2015	EN ISO 20471: 2013
A1, B1, C1, E1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 1 EBT50=9.5cal/cm²	Class 1, A1	Class 2

### BOX TEST ARC RATING FABRIC

4KA	9.5CAL	VXS+ INHERENT™
CLASS 1	ARC 2	

\*7414 meets class 1 and 7418 meets class 2

7414

# LADIES TROUSER

**SIZES:**  
 8-16 Reg leg (30"/76cm)



### PRODUCT INFORMATION

**COLOUR:** HV Yellow  
**FABRIC SPECIFICATION:**  
 VXS+ HVY250W 250g/m² Woven  
 Inherent Hi-Visibility Fabric  
**LOI:** 30.6%  
**PRODUCT CARE:**



No seams on shoulders to improve durability and comfort whilst wearing harness

**PRODUCT INFORMATION**

**COLOUR:** HVYellow / Navy  
**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 395gms  
**Lining Layer:** VXS+ Inherent Woven fabric - 200gms  
**LOI:** 27.0%  
**PRODUCT CARE:**

9750

# WATERPROOF JACKET

SIZES: S-4XL

- ✓ Two tone design // Practical and stylish
- ✓ Elasticated inner cuffs // Wind proofing
- ✓ Velcro® fastening tabs on cuffs and back // Improved fit
- ✓ Fully adjustable, fold away hood with Velcro® // Safety and comfort
- ✓ Radio loop attaching point on left breast
- ✓ Storm flap // Wind proofing
- ✓ Zipped Napoleon pocket on left breast with incorporated phone pocket // Safe and secure
- ✓ Taped seams // Waterproof and windproof
- ✓ Inner pockets on right hand breast // Storage space
- ✓ Covered, zipped hand pockets // Keeps out debris and keeps contents secure
- ✓ Mandarin collar // Maximum neck protection
- ✓ 50mm double stitched reflective tape // Increased durability
- ✓ Fully lined // Warmth and comfort
- ✓ Easy-Stretch™ side panels // Wearer comfort
- ✓ Extended back // Protection when bending over
- ✓ SafetyICON™ // Visual EN standards
- ✓ ThermSAFE™ plastic FR zipper // CE Certified

**EN STANDARDS**

EN ISO 11612: 2015	EN 1149-5: 2008	EN ISO 11611: 2015	EN ISO 20471: 2013	EN 343:2003 +A1:2007	EN 13034: 2005	IEC 61482-2: 2009	IEC 61482-2: 2009
A1, B1, C1, D2, E3, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 2, A1	Class 3	Class 3/3	Type PB (6) +A1:2009	ATPV= 47cal/cm²	Class 2

**BOX TEST ARC RATING FABRIC**

7KA 47CAL

**CLASS 2 ARC 4**

9880

# WATERPROOF SALOPETTES


SIZES: S-4XL



Removable and adjustable braces



Expandable ankle opening with zipper



Salopettes are part of 2 garment set and should be worn with the compatible jacket (9750)



**PRODUCT INFORMATION**

**COLOUR:** HVYellow / Navy  
**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 395gms  
**Lining Layer:** VXS+ Inherent Woven Fabric - 200gms  
**LOI:** 27.0%  
**PRODUCT CARE:**

- ✓ 70mm double stitched reflective tape // Increased durability
- ✓ Combat pocket with phone pocket // Convenience and storage space
- ✓ 2 side pockets // Storage space
- ✓ Side access // For use as overtrousers
- ✓ Fully lined // Warmth and comfort
- ✓ Removable & adjustable suspenders
- ✓ Suspender back plate // Adjustable for comfort
- ✓ SafetyICON™ on arm // Visual EN Certified
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extra wide belt loop at rear // Prevents belt riding up

**EN STANDARDS**

EN ISO 11612: 2015	EN 1149-5: 2008	EN ISO 11611: 2015	EN ISO 20471: 2013	EN 343:2003 +A1:2007	EN 13034: 2005	IEC 61482-2: 2009	IEC 61482-2: 2009
A1, B1, C1, D2, E3, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 2, A1	Class 2	Class 3/3	Type PB (6) +A1:2009	ATPV= 47cal/cm²	Class 2

**BOX TEST ARC RATING FABRIC**

7KA 47CAL


**CLASS 2 ARC 4**

7480

# COVERALL

**SIZES:**  
S-4XL Reg leg (31"/80cm)  
M-2XL Tall leg (33"/85cm)

Featuring flame resistant ThermSAFE™ hook and loop



Double stitched 5cm FR AS reflective tape



Side access pockets



7482

# LADIES COVERALL

**SIZES:**  
8-16 Reg leg (29"/175cm)



Cut in a specific women's fit

9720



No seams on shoulders to improve durability and comfort whilst wearing harness

**PRODUCT INFORMATION**

**COLOUR:** HV Yellow / Navy  
**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 250gms  
**Lining Layer:** VXS+ Inherent Woven Fabric - 120gms  
**PRODUCT CARE:**



# LIGHTWEIGHT WATERPROOF JACKET

**SIZES:** S-4XL

- ✓ Elasticated inner cuffs // Wind proofing
- ✓ Cuff tabs with Velcro® brand fasteners // Improved fit
- ✓ Fully adjustable, fold away hood with Velcro® // Safety and comfort
- ✓ Storm flap // Wind proofing
- ✓ Removable hood
- ✓ Radio loop attaching point on left breast
- ✓ Zipped Napoleon pocket on left breast with incorporated phone pocket // Safe and secure
- ✓ Inner pockets on right hand breast // Storage space
- ✓ Taped seams // Waterproof and windproof
- ✓ Covered, zipped hand pockets // Keeps out debris and keeps contents secure
- ✓ No seams on shoulder // Improved durability and comfort whilst wearing a harness
- ✓ Mandarin collar // Maximum neck protection
- ✓ 50mm FR reflective tape // Increased durability
- ✓ 120gms lining // Lightweight
- ✓ Easy-Stretch™ side panels // Wear comfort
- ✓ Extended back // Protection when bending over
- ✓ SafetyICON™ // Visual EN Standards
- ✓ ThermSAFE™ plastic FR zipper // CE Certified

- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Chest pockets with flaps // Secure storage
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Standards icon system
- ✓ 5cm FR AS reflective tape // Double stitched for longer life
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort

**PRODUCT INFORMATION**

**COLOUR:** HV Yellow  
**FABRIC SPECIFICATION:**  
VXS+ HVY250W 250g/m<sup>2</sup> Woven Inherent Hi-Visibility Fabric  
**LOI:** 30.6%  
**PRODUCT CARE:**

EN STANDARDS				
A1, B1, C1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1 EBT50= 9.5cal/cm <sup>2</sup>	Class 1, A1	Class 3

BOX TEST	ARC RATING	FABRIC
4KA	9.5CAL	
<b>CLASS 1</b>	<b>ARC 2</b>	

EN STANDARDS							
A1, B1, C1 D1, E1, F1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1, A1	Class 3	Class 3/3	Type PB (6) +A1:2009	ATPV 25cal/cm <sup>2</sup> , ELIM 23cal/cm <sup>2</sup>	APC 2

BOX TEST	ARC RATING	FABRIC
7KA	25CAL	
<b>CLASS 2</b>	<b>ARC 3</b>	

9820

# LIGHTWEIGHT WATERPROOF SALOPETTES

SIZES: S-4XL



Removable and adjustable braces

Expandable ankle opening with zipper

### PRODUCT INFORMATION

**COLOUR:** HV Yellow / Navy

**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 250gms

**Lining Layer:** VXS+ Inherent Woven Fabric -120gms

**PRODUCT CARE:**



- ✓ 50mm FR reflective tape // Increased durability
- ✓ Combat pocket with phone pocket // Convenience and storage space
- ✓ 2 side pockets // Storage space
- ✓ Side access // For use as overtrousers
- ✓ 120gms lining // Lightweight
- ✓ Removable & adjustable suspenders
- ✓ Suspender back plate // Adjustable for comfort
- ✓ SafetyICON™ on arm // Visual EN Certified
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extra wide belt loop at rear // Prevents belt riding up

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	EN ISO 20471: 2015	EN ISO 20471: 2013	EN 343: 2019	EN 13034: 2005	IEC 61482-2: 2018	IEC 61482-2: 2018
A1, B1, C1 D1, E1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	Class 1, A1	Class 1	Class 3/3	Type PB (6) +A1:2009	ATPV 25cal/cm², ELIM 23cal/cm²	APC 2

### BOX TEST

7KA	25CAL
CLASS 2	ARC 3

### ARC RATING



“ We have had these trousers for over 6 months and they are still going strong whereas before we had to replace trousers nearly every three weeks! ”

# HI VIS ORANGE COLLECTION

For full Product Matrix outlining EN Standards, see page 102

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

Colourfast with less than 3% washing shrinkage\*

\*Only applicable for woven fabrics



**5290 POLO SHIRT**

Page 56



**5648 SWEATSHIRT**

Page 57



**4608 JACKET**

Page 58



**4616 TROUSER**

Page 59



**9440 WATERPROOF JACKET**

Page 60



**9660 WATERPROOF SALOPETTES**

Page 61



**4690 COVERALL**

Page 62



**9422 LIGHTWEIGHT WATERPROOF JACKET**

Page 63



**9622 LIGHTWEIGHT WATERPROOF SALOPETTES**

Page 64



5290

# POLO SHIRT

SIZES: S-4XL




IMPROVED

Ultra-soft and durable VXS+ Fabric



Safety ICON  
EN Standard  
identification



Contrast  
cuffing

- ✓ Enclosed stud placket // Allows quick fastening
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable with good moisture management
- ✓ ThermSAFE™ plastic FR poppers // CE Certified
- ✓ Knitted collar with tipping // Ensures best appearance after washing
- ✓ Contrast colour collar // Stylish and practical
- ✓ Rib knit cuffs // Close fit
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ 5cm FR AS reflective tape // Heat applied to improve flexibility

5292

# LADIES POLO SHIRT

SIZES: 8-16



### PRODUCT INFORMATION

COLOUR: HV Orange

FABRIC SPECIFICATION:  
ProGARM® VXS+ Inherent Pique  
Fabric, HV Orange - 220gms

PRODUCT CARE:



### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2018	EN ISO 20471: 2013	Compliant
A1, B1, C1	Pt. 5:2008 Pt. 3:2004 Charge Decay	APC1 ATPV=6cal/cm²	Class 3	Issue 1

### BOX TEST



### ARC RATING



### FABRIC



\*5292 meets Class 2 and 5290 meets Class 3

5648

# SWEATSHIRT

SIZES: S-4XL



Twin needle  
stitch on  
neckline



Useful arm  
pocket for  
phone or  
small items



Fleece lined for  
extra warmth

### PRODUCT INFORMATION

COLOUR: HV Orange

FABRIC SPECIFICATION:  
ProGARM® VXS+ Inherent Sweat  
Fabric, HV Orange - 430gms

LOI: 30.2%

PRODUCT CARE:



- ✓ Brushed fleece inner // Winter warmth
- ✓ VXS+ blend // Natural feel, comfortable and soft
- ✓ Breathable with good moisture management
- ✓ Round neck collar with stretch rib // Smart appearance
- ✓ Contrast colour collar // Stylish and practical
- ✓ Rib knit cuffs // Close fit
- ✓ 5cm stretch rib hem // Best fit around the waist
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ Arm pocket // Useful pocket for phone or small items
- ✓ 5cm FR AS reflective tape // Heat applied to improve flexibility

### EN STANDARDS

EN ISO 11612: 2015	Compliant	IEC 61482-2: 2009	EN ISO 20471: 2013
A1, B1, C1	Issue 1	CEBTS0=21.6 Cal/cm² Class 1	Class 3

### BOX TEST



### ARC RATING



### FABRIC





Vertical pocket with zipper



Adjustable waist fastening for improved fit



Side pockets with flaps to prevent debris

**IMPROVED**

**4608**

# JACKET

SIZES: S-4XL

- ✓ Mandarin collar for maximum neck protection
- ✓ Vertical chest pocket with zipper // Discreet design
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Standard icon system
- ✓ 5cm FR AS reflective Tape // Double stitched for longer life
- ✓ Phone pocket on sleeve with flap // Safe and secure

- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets with flaps // Prevents entry of debris
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extended back // Protection when bending over
- ✓ Double stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort

EN STANDARDS					
EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2018	EN ISO 11611: 2015	EN ISO 20471: 2013	Compliant
A1, B1, C1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	ATPV = 8cal/cm² APC 1	Class 1, A1	Class 3	Issue 1

BOX TEST	ARC RATING	FABRIC
<b>CLASS 1</b>	<b>ARC 2</b>	

**PRODUCT INFORMATION**

**COLOUR:** HV Orange  
**FABRIC SPECIFICATION:** ProGARM VXS+ Inherent Woven Fabric, HV Orange - 290gms  
**PRODUCT CARE:**



**4616**

# TROUSER

SIZES: 30" - 52" Reg leg (32"/81cm)  
 32" - 44" Tall leg (34"/86cm)  
 30" - 42" Short leg (30"/76cm)



Reinforced crotch panel



Combat pocket on right leg with SafetyICON™ EN Standard identification



Triple stitched side seams

**IMPROVED**

**4614**

# LADIES TROUSER

SIZES: 8-16 Reg leg (30"/76cm)



**PRODUCT INFORMATION**

**COLOUR:** HV Orange  
**FABRIC SPECIFICATION:** ProGARM VXS+ Inherent Woven Fabric, HV Orange - 290gms  
**PRODUCT CARE:**

- ✓ Combat pocket with flap // Safe storage space
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Mobile phone pocket // Keeps your phone safe
- ✓ Side access pockets with flaps // Protects from debris entry
- ✓ Extra wide belt loop at rear // Prevents belt riding up
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ SafetyICON™ on leg pocket // Visual EN Standard icon system
- ✓ Rear pockets with flap // Secure storage space
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Reinforced crotch // Improved longevity
- ✓ ThermSAFE™ jeans button // Jeans style fastening
- ✓ 5cm FR AS reflective tape // Double stitched for longer life

**EN STANDARDS**

EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2018	EN ISO 11611: 2015	EN ISO 20471: 2013	Compliant
A1, B1, C1, F1	Pl. 5:2008 Pl. 3:2004 Charge Decay	ATPV = 8cal/cm² APC 1	Class 1, A1	Class 1	Issue 1

**BOX TEST ARC RATING FABRIC**

<b>CLASS 1</b>	<b>ARC 2</b>	



No seams on shoulders to improve durability and comfort whilst wearing harness

**PRODUCT INFORMATION**

**COLOUR:** HV Orange  
**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 395gms  
**Lining Layer:** VXS+ Inherent Woven Fabric - 200gms  
**LOI:** 27.0%  
**PRODUCT CARE:**

9440

# WATERPROOF JACKET

SIZES: S-4XL

- ✓ Elasticated inner cuffs // Wind proofing
- ✓ Storm flap // Wind proofing
- ✓ Taped seams // Waterproof and windproof
- ✓ Velcro® fastening tabs on cuffs and back // Improved fit
- ✓ Fully adjustable, fold away hood with Velcro® // Safety and comfort
- ✓ Radio loop attaching point on left breast
- ✓ Zipped Napoleon pocket on left breast with incorporated phone pocket // Safe and secure
- ✓ Inner pockets on right hand breast // Storage space
- ✓ Covered, zipped hand pockets // Keeps out debris and keeps contents secure

- ✓ No seams on shoulder // Improved durability and comfort whilst wearing a harness
- ✓ Mandarin collar // Maximum neck protection
- ✓ 50mm double stitched reflective tape // Increased durability
- ✓ Fully lined // Warmth and comfort
- ✓ Easy stretch side panels // Wearer comfort
- ✓ Extended back // Protection when bending over
- ✓ SafetyICON™ // Visual EN Standard
- ✓ ThermSAFE™ plastic FR zipper // CE Certified

**EN STANDARDS**

EN ISO 11612: 2015	EN 1149-5: 2008	EN ISO 11611: 2015	EN ISO 20471: 2013	EN 343:2003 +A1:2007	EN 13034: 2005	IEC 61482-2: 2009	IEC 61482-2: 2009	Compliant
A1, B1, C1, D2, E3, F1	Pl. 5:2008 Pt. 3:2004 Charge Decay	Class 2, A1	Class 3	Class 3/3	Type PB (6) +A1:2009	ATPV= 47cal/cm²	Class 2	Issue 1

**BOX TEST ARC RATING FABRIC**

7KA 47CAL

**CLASS 2 ARC 4**


9660

# WATERPROOF SALOPETTES

SIZES: S-4XL



Removable braces



Expandable ankle opening with zipper



Salopettes are part of 2 garment set and should be worn with the compatible jacket (9440)



**PRODUCT INFORMATION**

**COLOUR:** HV Orange  
**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 395gms  
**Lining Layer:** VXS+ Inherent Woven Fabric - 200gms  
**LOI:** 27.0%  
**PRODUCT CARE:**

- ✓ 70mm double stitched reflective tape // Increased durability
- ✓ Combat pocket with phone pocket // Convenient storage space
- ✓ 2 side pockets // Storage space
- ✓ Side access // For use as overtrousers
- ✓ Fully lined // Warmth and comfort

- ✓ Removable and adjustable suspenders
- ✓ Suspender back plate // Adjustable for comfort
- ✓ SafetyICON™ on arm // Visual EN Standard
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extra wide belt loop at rear // Prevents belt riding up

**EN STANDARDS**

EN ISO 11612: 2015	EN 1149-5: 2008	EN ISO 11611: 2015	EN ISO 20471: 2013	EN 343:2003 +A1:2007	EN 13034: 2005	IEC 61482-2: 2009	IEC 61482-2: 2009	Compliant
A1, B1, C1, D2, E3, F1	Pl. 5:2008 Pt. 3:2004 Charge Decay	Class 2, A1	Class 2	Class 3/3	Type PB (6) +A1:2009	ATPV= 47cal/cm²	Class 2	Issue 1

**BOX TEST ARC RATING FABRIC**

7KA 47CAL

**CLASS 2 ARC 4**

4690

# COVERALL


**SIZES:**  
S-4XL Reg leg (31"/80cm)  
M-2XL Tall leg (33"/85cm)

Internal elasticated waistband for improved fit



Wear with kneepads for extra protection

IMPROVED



Double stitched 5cm FR AS reflective tape



4692

# LADIES COVERALL

**SIZES:**  
8-16 Reg leg (29"/75cm)



Cut in a specific women's fit

## PRODUCT INFORMATION

**COLOUR:** HV Orange  
**FABRIC SPECIFICATION:** ProGARM® VXS+ Inherent Woven Fabric, HV Orange - 290gms

**PRODUCT CARE:**  
 (P)

- ✓ Mandarin collar // Maximum neck protection
- ✓ Kneepad pockets // Wear with kneepads for extra protection
- ✓ Chest pockets with flaps // Secure storage
- ✓ Gas monitor loop // Secure fixing point
- ✓ SafetyICON™ on arm // Visual EN Standard
- ✓ 5cm FR AS reflective tape // Double stitched for longer life
- ✓ Phone pocket on sleeve with flap // Safe and secure
- ✓ Velcro® secured cuff tabs // Close fit around wrist or gloves
- ✓ Side access pockets // With entry inside coverall
- ✓ ThermSAFE™ plastic FR zippers // CE Certified
- ✓ Internal elastic 2 point adjustable waistband // Ensures close fit
- ✓ Triple stitched side seams // Lifetime quality assurance
- ✓ Easy-Stretch™ side panels // Maximum wear comfort

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2018	EN ISO 11611: 2015	EN ISO 20471: 2013	Compliant
A1, B1, C1, F1	Pl. 5:2008 Pt. 3:2004 Charge Decay	ATPV = 8cal/cm² APC 1	Class 1, A1	Class 3	Issue 1

### BOX TEST

4KA
CLASS 1

### ARC RATING

8CAL
ARC 2

### FABRIC



9422

# LIGHTWEIGHT WATERPROOF JACKET

**SIZES:** S-4XL

No seams on shoulders to improve durability and comfort whilst wearing harness



## PRODUCT INFORMATION

**COLOUR:** HV Orange  
**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 250gms  
**Lining Layer:** VXS+ Inherent Woven Fabric - 120gms  
**PRODUCT CARE:**  
 (P)



- ✓ Elasticated inner cuffs // Wind proofing
- ✓ Storm flap // Wind proofing
- ✓ Taped seams // Waterproof and windproof
- ✓ Cuff tabs with Velcro® brand fasteners // Improved fit
- ✓ Fully adjustable, fold away hood with Velcro® // Safety and comfort
- ✓ Removable hood
- ✓ Radio loop attaching point on left breast
- ✓ Zipped Napoleon pocket on left breast with incorporated phone pocket // Safe and secure
- ✓ Inner pockets on right hand breast // Storage space
- ✓ Covered, zipped hand pockets // Keeps out debris and keeps contents secure
- ✓ No seams on shoulder // Improved durability and comfort whilst wearing a harness
- ✓ Mandarin collar // Maximum neck protection
- ✓ 50mm FR reflective tape // Increased durability
- ✓ 120gms lining // Lightweight
- ✓ Easy-Stretch™ side panels // Wear comfort
- ✓ Extended back // Protection when bending over
- ✓ SafetyICON™ // Visual EN standards
- ✓ ThermSAFE™ plastic FR zipper // CE Certified

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	EN ISO 11611: 2015	EN ISO 20471: 2013	EN 343: 2019	EN 13034: 2005	IEC 61482-2: 2018	IEC 61482-2: 2018	Compliant
A1, B1, C1 D1, E1, F1	Pl. 5:2008 Pt. 3:2004 Charge Decay	Class 1, A1	Class 3	Class 3/3	Type PB (6) +A1:2009	ATPV = 25cal/cm² ELIM 23cal/cm²	APC 2	Issue 1

### BOX TEST

7KA
CLASS 2

### ARC RATING

25CAL
ARC 3



9622

# LIGHTWEIGHT WATERPROOF SALOPETTES

SIZES: S-4XL



Removable and adjustable braces



Expandable ankle opening with zipper

### PRODUCT INFORMATION

**COLOUR:** HV Orange

**FABRIC SPECIFICATION:**  
**Outer Layer:** VXS+ Inherent Special Weave Fabric with Waterproof Membrane - 250gms

**Lining Layer:** VXS+ Inherent Woven Fabric -120gms

**PRODUCT CARE:**



- ✓ 50mm FR reflective tape // Increased durability
- ✓ Combat pocket with phone pocket // Convenience and storage space
- ✓ 2 side pockets // Storage space
- ✓ Side access // For use as overtrousers
- ✓ 120gms lining // Lightweight
- ✓ Removable & adjustable suspenders
- ✓ Suspender back plate // Adjustable for comfort
- ✓ SafetyICON™ on arm // Visual EN Certified
- ✓ ThermSAFE™ plastic FR zipper // CE Certified
- ✓ Extra wide belt loop at rear // Prevents belt riding up

### EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	EN ISO 11611: 2015	EN ISO 20471: 2013	EN 343: 2019	EN 13034: 2005	IEC 61482-2: 2018	IEC 61482-2: 2018	Compliant
A1, B1, C1, D1, E1, F1	Pt. 5:2008 Pt. 3:2004 Charge Decay	Class 1, A1	Class 1	Class 3/3	Type PB (6) +A1:2009	ATPV= 25cal/cm² ELIM 23cal/cm²	APC 2	Issue 1

BOX TEST: 7KA CLASS 2

ARC RATING: 25CAL ARC 3

FABRIC: **VXS+ INHERENT™**

“ Following trials, ProGARM® were the clear winner of the ARC Protection garments we needed. Having trialled nearly every supplier in the UK, ProGARM® were clear winners - shrinkage was minimal and the garment kept its shape - overall a fantastic product. ”

**VXS+**  
INHERENT™

100%  
INHERENT

**ProGARM**<sup>®</sup>  
PROTECTING LIVES

# BASELAYERS COLLECTION

For full Product Matrix outlining EN Standards, see page 102

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

Colourfast with less than 3% washing shrinkage\*

\*Only applicable for woven fabrics



## 8210 BASELAYER TOP

Page 68



## 8220 BASELAYER LEGGINGS

Page 69



## 8100 BALACLAVA

Page 70



## 8300 SNOOD

Page 70



## 8400 HELMET LINER

Page 70



LADIES AVAILABLE  
8700F

## 8700 BOXER BRIEFS

Page 71



## 8770 FR BRA

Page 72



## 2101 COMPRESSION SOCKS

Page 72



## 2102 GENERAL BOOT SOCKS

Page 72





**8210**

# BASELAYER TOP

SIZES: S-4XL

**PRODUCT INFORMATION**

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** VXS+ Inherent Jersey Fabric, Navy - 220gms  
**PRODUCT CARE:**

- ✓ Garment layering benefits for extra protection
- ✓ Extra soft flame resistant fabric
- ✓ Contrast threads
- ✓ Elastic fabric to fit all shapes and sizes
- ✓ Thumb hole for extra hand protection
- ✓ Extended back
- ✓ L-shaped seams for wearer comfort
- ✓ Fully machine washable

EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2009
A1, B1, C1	Pl. 5:2008 Pl. 3:2004 Charge Decay	EBT50= 4.9caU/cm²

ARC RATING FABRIC

**4.9CAL**

**ARC 1**

**VXS+ INHERENT™**



**8220**

# BASELAYER LEGGINGS

SIZES: S-4XL

**PRODUCT INFORMATION**

**COLOUR:** Navy  
**FABRIC SPECIFICATION:** VXS+ Inherent Jersey Fabric, Navy - 220gms  
**PRODUCT CARE:**

- ✓ Extra soft fabric
- ✓ Contrast threads
- ✓ Fully machine washable

EN STANDARDS

EN ISO 11612: 2015	EN 1149-5: 2018	IEC 61482-2: 2009
A1, B1, C1	Pl. 5:2008 Pl. 3:2004 Charge Decay	EBT50= 4.9caU/cm²

ARC RATING FABRIC

**4.9CAL**

**ARC 1**

**VXS+ INHERENT™**

8100

**BALACLAVA**

SIZES: One Size




Contrast threads

- ✓ Extra soft fabric
- ✓ Elastic fabric to fit all shapes and sizes

**PRODUCT INFORMATION**

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ Inherent Jersey Fabric, Navy - 220gms  
**PRODUCT CARE:**

**EN STANDARDS**



8300

**SNOOD**

SIZES: One Size



Elastic fabric to fit all shapes and sizes

Can be worn in multiple forms


Double stitching for longevity

- ✓ Contrast threads
- ✓ Clear label with batch traceability
- ✓ Extra soft fabric

**PRODUCT INFORMATION**

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ Inherent Jersey Fabric, Navy - 220gms  
**PRODUCT CARE:**

**EN STANDARDS**



8400

**HELMET LINER**

SIZES: One Size




- ✓ Extra soft fabric
- ✓ Contrast threads
- ✓ Elastic fabric to fit all shapes and sizes

**PRODUCT INFORMATION**

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 VXS+ Inherent Jersey Fabric, Navy - 220gms  
**PRODUCT CARE:**

**EN STANDARDS**



8700-M

**MENS BOXER BRIEFS**


SIZES: S/M, L/XL, 2XL/3XL



Colour matched to other navy ProGARM® garments

- ✓ Mesh stripes on side of garment for increased breathability
- ✓ Very light fabric for increased comfort
- ✓ Elasticated waist band
- ✓ Seamless sides for additional comfort

**EN STANDARDS**



8700-F

**LADIES BOXER BRIEFS**

SIZES: S/M, L/XL, 2XL/3XL



**PRODUCT INFORMATION**

**COLOUR:** Navy  
**FABRIC SPECIFICATION:**  
 ProGARM® VXS+ Inherent Knitted Fabric, Navy - 180gms  
**PRODUCT CARE:**



8770

## FR BRA

SIZES: XS-2XL




- ✓ Extra soft fabric
- ✓ Elastic fabric to fit all shapes and sizes

### PRODUCT INFORMATION

COLOUR: Black  
 FABRIC SPECIFICATION: 330gms  
 PRODUCT CARE:

### EN STANDARDS



2101

## COMPRESSION SOCKS

SIZES:

UK: 4-7  
 EU: 38/41 S/M  
 UK: 8-11  
 EU: 40/46 L/XL



- ✓ Improves performance, as worn by top athletes
- ✓ Improved blood circulation, reduces tiredness in the legs


### PRODUCT INFORMATION

COLOUR: Navy  
 PRODUCT CARE:

### IMPORTANT NOTE

Not to be worn by diabetics.  
 Not to be worn by anyone with a heart condition or anyone who has previously suffered a stroke.

### EN STANDARDS



2102

## GENERAL BOOT SOCKS

SIZES:

UK: 4-7  
 EU: 38/41 S/M  
 UK: 8-11  
 EU: 40/46 L/XL




- ✓ Extra soft fabric
- ✓ Contrast threads
- ✓ Elastic fabric to fit all shapes and sizes

### PRODUCT INFORMATION

COLOUR: Navy  
 PRODUCT CARE:

### EN STANDARDS



“ Non-arc flash base layers can compromise the protection given by arc flash layers worn on top of them. Protect your team with our arc rated baselayers. ”

# HEAD PROTECTION PRODUCTS

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

High quality products give excellent value for money



**2660 SAFETY HELMET CLASS 1 & 2668 REPLACEMENT VISOR**

Page 76



**2688 SAFETY HELMET 8.4 CAL & 2687 REPLACEMENT VISOR**

Page 77



**2690 SAFETY HELMET 24CAL & 2667 REPLACEMENT VISOR**

Page 78



**2676 EAR MUFFS**

Page 79



**2674 HEAD HARNESS**

Page 79



**2664 CHIN STRAP**

Page 79



**2671 PHOTON HEADLIGHT**

Page 80



**2662 FRONT SWEATBAND**

Page 80



**2666 BACK SWEATBAND**

Page 80



**2682 ZONE EAR DEFENDER ADAPTORS**

Page 81



**2677 STORAGE BAG**

Page 81



**2672 VISOR CLEANING CLOTH**

Page 81



**9700 ARC4 HOOD**

Page 82

2660

**SAFETY HELMET CLASS 1**

SIZES: One Size



2668

**REPLACEMENT VISOR**

SIZES: One Size  
Resistance to fogging (N)



2688

**SAFETY HELMET 8.4CAL**

SIZES: One Size



2687

**REPLACEMENT VISOR**

SIZES: One Size  
Resistance to fogging (N)



**HELMET**

- ✓ Stroke absorption after conditioning in temperatures of (-30°C) and (0°C)
- ✓ Resistance to penetration after conditioning in temperatures of (-30°C) and (+50°C)
- ✓ Live working symbol (Two Triangles)
- ✓ Working temperature range (-30°C) and (+50°C)
- ✓ Wheel ratchet adjustment
- ✓ Adjustable head circumference from 53-63cm
- ✓ Two level height adjustment feature
- ✓ Electrical insulation (Class 0) 1000V AC, 1500V DC
- ✓ Protection against molten metal splash - symbol MM
- ✓ Protection against lateral deformations - symbol LD

**VISOR**

- ✓ Level of protection 1.2 (transparent face shield)
- ✓ Level of protection 1.7 (dimmed face shield)
- ✓ Protection against droplets and splashes of liquids (3)
- ✓ Optical powers, light transmission factor, luminance factor of dispersed light Optical Class 1
- ✓ Resistance to medium energy impact (speed stroke up to 120m/s, mass of ball 0.86kg) (B)
- ✓ Protection against short circuit electric arc (8)
- ✓ Protection against thermal hazards of an electric arc, Class 1 (box test; 4kA/0.5s) VLT factor → 75% for class 0
- ✓ Protection against molten metal and hot solids (9)
- ✓ Resistance to surface damage by fine particles (K)

**HELMET**

- ✓ Shock absorption, tested after artificial ageing, wet conditioning and thermal conditioning in temperatures (-30°C) and (+50°C)
- ✓ Resistance to penetration, tested after artificial ageing, wet conditioning and thermal conditioning in temperatures (-30°C) and (+50°C)
- ✓ Resistance to flame
- ✓ Protection against lateral deformations - symbol LD
- ✓ Protection against molten metal splash - symbol MM
- ✓ Protection against electrical shock (Class 0)

**VISOR**

- ✓ Optical powers, light transmission factor, luminance factor of dispersed light - optical Class 1
- ✓ Resistance to medium energy impact (speed of stroke up to 120 m/s, mass of the ball 0.86g) - symbol B
- ✓ Protection against droplets and splashes of liquids - symbol 3
- ✓ Level of protection 2-1.4 (yellow - green face shield)
- ✓ Face shield with enhanced colour recognition: red, yellow, green and blue according to p. 4.2.3 standard EN 172:2000 - symbol C
- ✓ Protection against short circuit electric arc - symbol 8
- ✓ Protection against thermal hazards of an electric arc - Class 2 (box test)
- ✓ VLT factor 50% ⇐ VLT 75% ⇐ - Class 1
- ✓ Protection against molten metals and hot solids - symbol 9
- ✓ Protection against thermal hazards of an electric arc - ATPV = 8.4cal/cm<sup>2</sup>


EN STANDARDS



PRODUCT INFORMATION

LIFETIME: 5 Years  
SIZES: One Size  
COLOUR: White (other colours available)

EN STANDARDS



PRODUCT INFORMATION

LIFETIME: 4 Years  
SIZES: One Size  
COLOUR: White (other colours available)



2667

**REPLACEMENT VISOR**

SIZES: One Size



2690

**SAFETY HELMET 24 CAL** SIZES: One Size


**PRODUCT INFORMATION**

LIFETIME: 4 Years  
 SIZES: One Size  
 COLOUR: White (other colours available)

**HELMET**

- ✓ Shock absorption, tested after artificial ageing, wet conditioning and thermal conditioning in temperatures (-30°C) and (+50°C)
- ✓ Resistance to penetration, tested after artificial ageing, wet conditioning and thermal conditioning in temperatures (-30°C) and (+50°C)
- ✓ Resistance to flame
- ✓ Protection against molten metal splash - symbol MM
- ✓ Protection against lateral deformations - symbol LD

**EN STANDARDS**



**VISOR**

- ✓ Optical powers, light transmission factor, luminance factor of dispersed light - optical Class 1
- ✓ Resistance to medium range energy impact (speed of stroke up to 120 m/s, mass of the ball 0.86g - symbol B)
- ✓ Protection against droplets and splashes of liquids - symbol 3
- ✓ Resistance to UV radiation - symbol 2
- ✓ Level of protection 2-1.7 (green face shield)
- ✓ Face shield with enhanced colour recognition: red, yellow, green and blue according to p. 4.2.3 EN 172:2000 - symbol C
- ✓ Protection against short circuit electric arc - symbol 8
- ✓ Protection against thermal hazards of an electric arc, ATPV=24Cal/cm<sup>2</sup> / HAF=91%
- ✓ VLT Factor VLT<50% for Class 2



2676

**EAR MUFFS**

SIZES: One Size

- ✓ Fit adjustable ear muffs for attachment to the ProGARM® helmet with soft PVC cushions
- ✓ SNR: 23dB. CE EN 352-3 Certified
- ✓ Suitable for all ProGARM® arc flash helmets

2674

**HEAD HARNESS**

SIZES: One Size

- ✓ Complete replacement 4-point harness with textile webbing, front and rear sweatbands and ratchet mechanism for practical and easy one-hand size adjustment



2664

**CHIN STRAP**

SIZES: One Size

- ✓ Replacement chin strap with quick release fasteners
- ✓ Adjust and 4-point fitting



2671

## PHOTON HEADLIGHT

SIZES: One Size

- ✓ Waterproof and shock resistant headlight with adjustable head



2682

## ZONE EAR DEFENDER ADAPTORS

SIZES: One Size

- ✓ Adaptors to fit the popular zone ear defenders to the arc helmets



2662

## FRONT SWEATBAND

SIZES: One Size

- ✓ Replacement soft velour and foam sweatband for comfort and moisture absorption
- ✓ Velcro® fastening

2677

## STORAGE BAG

SIZES: One Size

- ✓ Storage bag to transport and protect ProGARM® arc flash helmets and other accessories



2666

## BACK SWEATBAND

SIZES: One Size

- ✓ Replacement soft velour and foam sweatband for comfort and moisture absorption
- ✓ Velcro® fastening



2672

## VISOR CLEANING CLOTH

SIZES: One Size

- ✓ Replacement soft cotton cloth to clean the visor
- ✓ For use with either of ProGARM® 2660, 2688 or 2690 arc flash helmets





Protection against electrical shock

Ultimate protection against flame & arc flash hazards

9700

# ARC4 HOOD

SIZES: One Size

## PRODUCT INFORMATION

SIZES: One Size

COLOUR: Navy

PRODUCT CARE:



### ASSEMBLY

The assembly of hood, visor and helmet has been tested to and certified to EN 166:2002, GS-ET-29:2011 (APC 2), and ASTM F2178-ATPV 47cal/cm<sup>2</sup>

### FABRIC

- ✓ VXS+ inherent special weave 395gms outer shell fabric with VXS+ inherent
- ✓ 200gms lining woven fabric, meeting the following standards:
- ✓ EN ISO 11612:2015 - A1, B1, C1, D2, E3, F1
- ✓ EN ISO 11611:2015 - Class 2, A1
- ✓ EN 1149-5:2008
- ✓ IEC 61482-2: Open Arc ATPV = 47cal/cm<sup>2</sup> - Category 4
- ✓ IEC 61482-2: Box Test = Class 2

### VISOR

Premium anti-fog coated highly transparent arc flash protective shield, colour grey, meeting the following standards:

- ✓ NFPA 70E, ASTM F2178 - 47cal/cm<sup>2</sup>
- ✓ ANSI Z87.1

### HELMET

Manufactured from high quality strong ABS material, up to 20% lighter than most other helmets, features Dry-Tech sweatband for maximum comfort, adjustable ratchet. Meeting the following standards:

- ✓ EN 397 - LD, MM, -40°C
- ✓ EN 50365
- ✓ ANSI/ISEA Class C



“

Provide total protection and optimum comfort by choosing tested, compliant and appropriate accessories.

”

ProGARM<sup>®</sup>  
PROTECTING LIVES



**VXS+**  
INHERENT™

100%  
INHERENT



# OTHER ACCESSORIES

✓ **INHERENT PROTECTION**

Flame resistant properties last the lifetime of the fabric and do not wash out

✓ **GREAT COMFORT**

Breathable, soft to wear and fantastic to the touch

✓ **INSTANT EXTINGUISHING PROPERTY**

Ultimate protection against flame and arc flash hazards

✓ **HIGHLY DURABLE**

High quality products give excellent value for money



**2000 KIT BAG**

Page 86



**2678 ARC GLOVES**

Page 86



**2240 FR KNEEPADS**

Page 87



**7721 DETACHABLE HOLSTER POCKET**

Page 87



**2700 ARC GLOVES**

Page 88



**2400 FR BELT**

Page 88



**8050 FR BEANIE HAT**

Page 88



**2205 WELDING APRON**

Page 89



**2200 WELDING GAITERS**

Page 89

2000

# KIT BAG

SIZES: One Size

Large capacity



- ✓ Zipped front pockets
- ✓ Zipped main compartment pocket
- ✓ Internal baseboard for rigidity
- ✓ Protective base feet for longer bag life

Detachable adjustable shoulder strap

**PRODUCT INFORMATION**

SIZES: 50cm x 25cm x 25cm (34 Litres)  
 COLOUR: Black  
 CODE: 2000

2678

# ARC GLOVES

SIZES: L (9), XL (10), XXL (11)

Winterized, waterproof and windproof

18oz/yd<sup>2</sup> goatgrain leather




- ✓ ARC Rated 50cm<sup>2</sup> // High ARC resistant rating
- ✓ Cut resistant // Level 2 & 3\* according to ANSI/ISEA 105 Scale
- ✓ Flame resistant // Exceeds industry standards according to ASTM D6413
- ✓ Durability // 5 x more durable than traditional driver gloves

**PRODUCT INFORMATION**

SIZES: L (9), XL (10), XXL (11)  
 COLOUR: Tan  
 CODE: 2678

EN STANDARDS



ARC RATING



2240

# FR KNEEPADS

SIZES: One Size

Excellent breathability due to air holes in the foam

Notched sides for maximum flexibility



- ✓ EN ISO 11612 Certified // Optimum safety
- ✓ High impact absorption from high grade cellular rubber
- ✓ Wash tested to ISO 15797, 12 cycles // Perfect stability

**PRODUCT INFORMATION**

SIZES: Width: 145mm x Length: 235mm  
 COLOUR: Black  
 CODE: 2240

EN STANDARDS



7721

# DETACHABLE HOLSTER POCKET

SIZES: One Size

VXS+ Woven Inherent Fabric, 300gms

**PRODUCT INFORMATION**

SIZES: One Size  
 COLOUR: Navy  
 CODE: 7721



Detachable holster pocket does not meet any EN standards on its own, must be worn with 7720 combat trousers.

2700

# ARC GLOVES

SIZES: M (8), L (9), XL (10), XXL (11)



Suitable for high risk environments

- ✓ Category 2 Arc rated
- ✓ Level 5 (EN388:2003 withdrawn) - Level D TDM (EN388:2016 current)
- ✓ Excellent dry and wet grip
- ✓ Good abrasion resistance
- ✓ Excellent oil, grease, glue and chemical resistance
- ✓ Dexterity, touch, elasticity and hand conformity similar to natural rubber

### PRODUCT INFORMATION

SIZES: M (8), L (9), XL (10), XXL (11)  
COLOUR: Khaki

EN STANDARDS		ARC RATING	
 EN 388:2016	 EN 407:2004	Tested to EN 388:2003 Cut Level 5	<b>8.6CAL</b> <b>ARC 2</b>
3.X.4.3.D	4.2.3.2.2	ANSI CUT F2992 Cut Level A4 Taber Abrasion Level 3	



2400

# FR BELT

SIZES: Waists 30"-38" (110cm)  
Waists 40"-48" (130cm)



8050

# FR BEANIE HAT

SIZES: One Size

2205

# WELDING APRON

SIZES: One Size



### PRODUCT INFORMATION

SIZES: M/L, XL/2XL  
COLOUR: Silver

- ✓ Highly molten metal splash resistant fabric
- ✓ Adjustable cuff
- ✓ Removable and position adjustable lower apron
- ✓ Elastic fastening on the back

### EN STANDARDS

 EN ISO 11611:2015
Class 1, A1

2200

# WELDING GAITERS

SIZES: One Size



### PRODUCT INFORMATION

SIZES: XS/S - XL/2XL  
COLOUR: Silver

- ✓ Highly molten metal splash resistant fabric
- ✓ Elastic band below the foot
- ✓ Flame resistant Velcro® fastening on the back for adjustment

### EN STANDARDS

 EN ISO 11611:2015
Class 1, A1

# USEFUL INFORMATION

## MADE TO PERFORM... EVEN IN THE WASHING MACHINE

### TRIED AND TESTED

It's essential to us that you have absolute confidence in your garments and know they'll continue to perform and keep your team safe, long after purchase.

To achieve EN certification, we extensively wash-test all our VXS+ fabrics before releasing them to market, paying close attention to colour fastness, how tear and tensile strength is affected, pulling resistance and dimensional change or shrinkage.

And, because our VXS+ fabrics are 100% inherent, they are arc flash and flame resistant for the life of the garment; protection doesn't wash out like it will with treated garments. In fact, we regularly test other garments and fabrics on the market to ensure our products remain at the forefront of arc flash protection.

### DON'T JUST TAKE OUR WORD FOR IT

Our garments have undergone wash trials at several commercial laundry companies on behalf of customers, so that they can see how our garments perform. In every case, our garments have passed those rigorous tests with flying colours.

Many of our fabrics have been certified to EN11612 after 50 industrial wash cycles, as specified in ISO 15797:2004. This involves being washed at 75°C and tunnel dried at 150°C for five minutes.

Many aramid fabrics are sensitive to high pH values in detergents and are more susceptible to colour change during industrial laundry.

However, our VXS+ fabric dye processes mean they're easier to wash and dry at home or through industrial laundry, extending the lifespan of the garment with low shrinkage and maintained hi-vis and brand standards.

INDUSTRIAL WASHING PROCEDURE ACCORDING TO ISO 15797		VXS+ 300W 300G/M2	ARAMID FABRIC
WASHING (75°C) AND TUMBLE DRYING (80°C)		COLOUR FASTNESS AFTER INDUSTRIAL WASHING (ISO 105 A02)	
INITIAL		5	5
25X		4-5	1-2
50X		3-4	1

Colour performance is measured on a level of 1 to 5 (with 5 being the maximum.)  
Note: Garments should be washed according to the care label.

As part of our commitment to quality, ongoing performance and customer confidence, we rigorously test reflective tapes and components (such as zips and press studs) too.

If you intend to commercially wash your ProGARM® garments, we're happy to talk with your laundry partner so that we're all confident in the processes they're using and that your team remains protected.

### EN STANDARDS AROUND GARMENT WASHING METHODS

#### EN ISO 6330: 2012 DOMESTIC

TEXTILES - DOMESTIC WASHING AND DRYING PROCEDURES FOR TEXTILE TESTING

This international standard defines the washing and drying procedures for textiles being washed at home with consideration for wash loads, drying procedures, chemicals and detergents and many other variables. The standard was reviewed in 2012, after 10 years of amendments with industry influencers, to ensure the standard was based on global practices.

All our garments meet or exceed this standard, with many fabrics and accessories in our collection also tested to the Industrial Wash standard EN ISO15797 - see below.

#### EN ISO15797: 2004 INDUSTRIAL

TEXTILES - INDUSTRIAL WASHING AND FINISHING PROCEDURES FOR TESTING OF WORKWEAR

This international standard defines the suitability of textiles for industrial washing, factoring in industrial washing machinery, larger wash loads, more demanding wash detergents, eight washing procedures (with hotter and tougher temperatures) and for two drying procedures including tunnel drying with temperatures up to 150°C. Some fabrics and accessories within the our range meet this standard for industrial washing in accordance with the correct procedures. For more information, please ask your ProGARM® representative.



# IMPORTANT CHANGES REPLACE THE PPE DIRECTIVE WITH AN EU REGULATION

Past issues of our catalogue provide information relating to Personal Protective Equipment (PPE) and the European Directive that regulates it, 89/686/EU.

On 21 April 2016, the PPE Directive was converted to a regulation (completely effective from 21 April 2018) with increased scope for the type of products and processes covered. It also now applies to the whole supply chain and not just the product manufacturer.

This places stronger obligations on manufacturers to regulate and audit their supply chain, which is something we at ProGARM® had already been doing for years.

The definition of PPE has also been expanded to be "Equipment designed and manufactured to be worn or held by a person for protection against one or more risks to that person's health or safety."

Certificates for existing PPE items remain valid until 21 April 2023, but all new PPE items need to be certified under the new regulation from 21 April 2018. Category 3 PPE items need to be recertified before 21 April 2023.



# ALWAYS READ THE LABEL



## THE CE MARK

Category 2 and 3 PPE should always bear the CE mark, followed by a four-digit number. This shows the garment is Type Approved by a notified body and complies with the requirements of either the PPE Directive (while still valid), or the new PPE Regulation (EU) 2016/425.

All our products comply with the requirements of the PPE Directive or with the new PPE Regulation as applicable.

## CE CERTIFIED GARMENTS COMPARED WITH 'CE CERTIFIED FABRICS'

When purchasing any arc flash or other protective clothing, always check that the finished garment has been tested.

Any garment correctly certified and CE marked should also display the relevant visual symbol for the standard with which it complies, such as the arc flash EN Standard symbol.

Where the fabric has been tested, but not the finished garment, the relevant EN Standard symbols will be missing from the garment label and replaced with text detailing the standard to which only the fabric has been tested.

All our garments are fully certified to the standards displayed on them. (An example care label is shown below.)

Style Number: 9750

CE Marking: **CE 0338**

EN Standards to which the garment meets:

Class 2, A1	A1, B1, C1, D2, E3, F1	Pl: 5:2008 Pt: 3:2004 Charge Decay	ATPV= 47 Cal/cm² Class 2	Class 3		Type 4

Wash Care Instructions:

**Aftercare:** • Do not bleach, do not boil, do not use soap based products - only detergents.  
• Company will not accept liability for garments where care labels have been ignored, neglected, defaced or removed.  
• Always store in clean, dry conditions.

Fabric Compositions:

**Fabric Composition:**  
Outer Layer: 50% Polyester/ 27% VXS+ Modacrylic / 22% Cotton/ 1% Antistatic - PU Laminated  
Lining Layer: 55% VXS+ Modacrylic / 44% Cotton/ 1% Antistatic  
Cuff: 45% Cotton/ 38% VXS+ Modacrylic / 10% Elastomer/ 9% Viscose

**This Jacket must be worn with ProGARM 9880 Salopette to offer Full Protection.**

Wash Instructions:

Clear Washing Care Symbols:

Batch Number For Traceability: **S1\_6101/6104**

Garment Edition Number: **CL-Version 1 Edition 1 Made in EU**

SIZE **M**

98-102 (chest)  
174-178 (height)

ProGARM®

# HOW PROGARM® PROTECTS YOUR TEAM AND EN STANDARDS

Our protective clothing is designed specifically for working in environments where heat, flame, low light, open arc, chemicals or static electricity are all potential hazards.

To ensure our garments protect in these environments, each item is certified and manufactured to a European Standard. These standards ensure that the design, materials used and performance after washing are maintained and reach minimum requirements.

## ALWAYS AHEAD OF THE GAME

When new - often more stringent - EN Standards are made available, we ensure our garments are certified to meet or exceed these requirements.

## WE'RE HERE TO HELP

Read on for information about the most relevant EN Standards that relate to the garments in our collection, together with some explanatory notes. We've done our best to ensure the information in this section is correct at the time of going to print - May 2021. For the exact wording and terminology of the standard, please refer to the relevant British Standards Institute (BSI) document available to purchase from the BSI or other sellers online.

To discuss the implications of these EN Standards for your business, or for an assessment of your current garments, please get in touch to speak to a specialist in your sector.



## RIS-3279-TOM

GO/RT 3279 was a high visibility standard that only applied to the rail industry in the UK, as opposed to the EU-wide nature of other EN Standards. It has now been officially replaced by a new Rail Industry Standard (RIS-3279-TOM) which reproduces the content of GO/RT 3279 in its entirety.

The aim of GO/RT 3279 and the new RIS-3279-TOM is to ensure that rail workers on or near the tracks are sufficiently visible to trains approaching at speed or any other traffic.

Stated in the standard is that: 'The colour specific requirements within this standard conform to the range specified within BS EN 20471 clause 5.1.2.'. In order to confine this to a specific orange colour and to prevent the selection of a colour at the red end of the spectrum, the precise chromaticity co-ordinates for the colour are specified as: Fluorescent orange, X:0.588, Y:0.371, with a luminance factor of at least 0.4. The accepted tolerance in colour is laid out in EN 20471. There is no tolerance for the luminance factor.

Also stipulated in the RIS 3279 standard is the need for retro-reflective materials, with photometric and physical performance aligned with EN 20471.

Mentioned in the RIS 3279 standard is the accepted use of a mini vest where the nature of the work being carried out will not obscure the high visibility clothing, and thus reduce the surface area that is visible. The same applies to company logos; these are permitted where they do not compromise the surface area of background colour, and compensation may have to be made for this.



## EN1149-5

PROTECTIVE CLOTHING WITH  
ELECTROSTATIC PROPERTIES

### ABOUT THIS EN STANDARD

This is the European Standard for garments that protect against electrostatic discharge in areas where there is a risk of explosion (ATEX Environments) such as in petrochemical refineries or when fuel is being delivered.

Annex II art 2.3 of the ATEX Directive 99/92/CE concerning the protection of workers likely to be exposed to the risk of explosive atmospheres says: "Workers must be provided with appropriate working clothing consisting of materials which do not give rise to electrical discharges that can ignite explosive atmospheres." As a consequence, the outer fabrics of these garments are made from antistatic materials and components.

Under the scope of the PPE Manufacturers Directive 89/686/EEC, a series of EN Standards have been developed relating to electrostatic properties. Key parts of these standards that relate to the protective garments we produce are noted here:

### EN1149-5 PERFORMANCE REQUIREMENTS

Antistatic PPE is certified to EN1149-5 as this standard covers the performance requirements of the garments and refers to the choice of two different methods (EN1149-1 or EN1149-3).

### EN1149-1 MEASUREMENTS OF SURFACE RESISTIVITY

This test method is most appropriate for materials for which the electrostatic dissipative behaviour is based on surface conductivity. That is materials containing surface conductive yarns or a homogeneous conductive outside PVC coating layer. This method is not appropriate for core conductive fibres.

### EN1149-3 MEASUREMENTS OF CHARGE DECAY

This test method is referenced as the most relevant for materials for which the electrostatic dissipative behaviour is based on core conducting fibres but can also be used for surface conducting materials.

In the EN1149 series there is also EN 1149-2 (measurement of electrical resistance through a material; the vertical resistance) which is also used as a test method in EN ISO 11611 (welders' clothing) and which is also mentioned in Annex H of EN469:2005. A further part of EN1149 is still under development which will cover the testing of the full garment - this part of the standard will be EN1149-4.



# EN 61482-2

## PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC

We produce garments that protect workers against the thermal hazards of an electric arc. Each garment style is carefully designed to offer the maximum protection whilst ensuring comfort and outstanding durability. As arc flash garments come under the requirements of Category 3 Protective Clothing, these garments are manufactured under Module D Quality Control Procedures.

### WHAT IS AN ELECTRIC ARC?

Electric arc, and the arc flash created, is an extremely dangerous and perhaps the least understood electrical hazard. They occur as a result of extreme discharges of voltage or electrical current from equipment including switchgear, transformers and heavy electrical equipment. The arc generates a high level of energy for a very short span of time (up to 1 second). The intense heat can create temperatures of more than 19,000°C and it also produces electric shock, extraordinary force and large quantities of thermal radiant energy.

### WHAT IS THE RISK?

Anywhere your employees are working with electricity, an arc flash can occur. To ensure adequate protection, you must be able to determine the maximum energy of default circuits in any electrical installation. The risks of an electric arc exposure are significant and potentially fatal through:

- Electrocution
- Extremely high levels of radiant heat
- Secondary fire or explosions (ignition to the surroundings)
- 1st, 2nd or 3rd degree burns – 3rd degree burns cause permanent damage

### BS EN 61482-2:2020 PERFORMANCE AND DESIGN REQUIREMENTS

The standard outlines the performance requirements for materials and design requirements for garments, as well as the external marking of garments and other user information that should be made available to wearers. All ProGARM® arc flash protective garments carry prominent external markings to indicate that is the case.

The standard also specifies the requirements and test methods applicable to materials and garments for protective clothing worn by electrical workers to protect them against the thermal hazards of electric arc. There are two main ways to test a garment's ability to protect a worker from the dangers of an arc flash.

### BS EN IEC 61482-1-1:2019 'OPEN ARC' TEST METHOD

The 'Open Arc' test method (ATPV test and garment test) replaces IEC 61482-1:2002. The 'Open Arc' test method is the same as the original North American method for measuring the Arc Thermal Performance Value (ATPV), as used in ASTM F1959. Materials or assemblies are given an ELIM, ATPV or EBT value, expressed in kilojoules per square metre (kJ/M2), which can be converted into the familiar Cal/cm².

### BS EN 61482-1-2:2014 'BOX ARC' TEST METHOD

The 'Box Arc' test method (Fabric classification and garment test) is based on the original European method described in ENV 50354, with a heat transfer measurement. Materials or assemblies are classified as Class 1 (4 kA) or Class 2 (7kA) (APC 1 or APC 2 if certified to BS EN 61482-2:2020).

During this test, a fabric sample is exposed to an electrical arc produced by a 4kA or 7kA short circuit. In the test, the arc does not last any longer than 500ms. The amount of heat transmitted through the sample is measured during and after the test. On the basis of the resulting data and a Stoll curve, the length of time it would take to cause the onset of 2nd degree burns is determined. Samples are also assessed for after-flaming, hole formation, melting.

### GARMENT TESTING AND FABRIC TESTING

It is important to note that not only should the fabric be tested to make sure it conforms to the Standard, but also the complete garment or garment assembly. The garment test is not testing for energetic value but to ensure the garment structure remains intact after the arc exposure and that components such as zips, press studs and buttons are still functional and don't cause further injury to the wearer by melting or heat transfer.

### LIMITATIONS OF USE

With arc protection, the environmental conditions and the risks at the working site need to be considered. For example, a test under the standard using a 4kA test current (Class 1) subjects the garment/fabric to an incident energy of 135kJ/m² +/-56 KJ/m² (3.2 +/-1.2 Cal/cm²) over a 500ms exposure at 18-28°C and at 45-75% relative humidity (RH). If the working environment deviates from this temperature/humidity range, the level of protection may be reduced. Exposure to higher incident energies or longer duration arcs may also result in the garment providing insufficient protection. Therefore it's essential to conduct comprehensive risk assessments before live working.

For full body protection, the protective clothing needs to be worn fully fastened and closed and other suitable protective equipment (e.g. helmet with protective face screen, protective gloves and boots) should be used. No garments, such as shirts, undergarments or underwear, should be used which melt under arc exposures – e.g. those made of polyamide, polyester or acrylic fibres. For maximum protection against arc flash exposure, multiple flame-resistant garments should be worn in layers.

### REPAIR INSTRUCTIONS

WARNING: tears to arc flash certified garments should not be repaired by the user. A flammable (not flame proof) thread or non-heat-proof element likely to melt would be extremely dangerous in the event of exposure to flame. Should there be any need to repair a garment, please contact us for guidance and safety advice.



# EN ISO 11611

## PROTECTIVE CLOTHING FOR WELDING AND ALLIED PROCESSES

All of our safety garments are certified in accordance with this EN Standard and are designed to protect workers in welding processes. Parts of this EN Standard are also used in conjunction with the arc flash Standard for which ProGARM® has an enviable reputation for high performance garments.

### ABOUT THIS EN STANDARD

Within this EN Standard is a series of tests - the most important of which are described in ISO 6942, ISO 9150, ISO 15025 and EN 1149-2.

ISO 11611 has two classes - if the fabric passes all the tests, it is designated as Class 1. If the fabric also receives a Class 2 rating for the ISO 6942 and ISO 9150 tests, it is designated as Class 2.

- CLASS 1 - Lower Hazard Welding Applications.
- CLASS 2 - Higher Hazard Welding Applications.

### EXPLAINING THE DIFFERENT TESTS

ISO 6942: This is a test method for assessing fabrics and fabric combinations exposed to radiant heat. In this test, a fabric sample is exposed to radiant heat (infrared rays). The temperature on the reverse (unexposed) side of the sample is registered using a calorimeter. The length of time the sample can remain exposed before the temperature on the unexposed side rises by 24°C is measured. This test is also used for EN 531C and has two different classes as follows:

- CLASS 1 - Temperature increase occurs after more than 7 seconds.
- CLASS 2 - Temperature increase occurs after more than 16 seconds.

ISO 9150: Determines the behaviour of fabrics when exposed to small spatters of molten metal. In this test, droplets of molten metal are spattered on a vertically suspended fabric sample. The number of droplets it takes to cause an increase in temperature of 40°C on the reverse side of the sample is determined. This test also has two classes as follows:

- CLASS 1 more than 15 droplets of molten metal.
- CLASS 2 more than 25 droplets of molten metal.

ISO 15025: This is the test method for limited flame spread. This test involves applying a flame to a fabric sample for 10 seconds. To pass the test, the after flame and smoulder times, together with the formation of holes, must be within the tolerances set in the standard. This test is also used for EN 531A.

The application of a flame can take place in two ways: in procedure A (leads to Class A1), the flame is applied horizontally (similarly to EN 470 and EN 531) in procedure B (leads to Class A2), the flame is applied laterally.

EN 1149-2: This is a test method for measuring the electrical resistance of a fabric sample and determining whether an electrical charge passes through the sample from the outside to the inside. For further information on this EN Standard please refer to the EN1149 section earlier in this section.

## TYPICAL EXAMPLES OF PROCESSES AND WHICH CLASS OF GARMENT MIGHT BE MOST RELEVANT

### CRITERIA FOR CHOICE BASED ON THE TYPE OF PROCESS

#### CLASS 1

Manual welding operations during which small amounts of spatter or droplets of molten metal are formed such as:

- Gas welding
- TIG welding
- MIG welding
- Micro plasma welding
- Soldering brass
- Spot welding
- Shielded electrode MMA welding

#### CLASS 2

Manual welding operations during which large amounts of spatter or droplets of molten metal are formed such as:

- MMA welding (using alkaline or cellulose electrodes)
- MAG welding (with CO2 or mixed gasses)
- MIG (high-voltage) welding
- Flux-cored arc welding
- Plasma cutting
- Gouging
- Oxygen cutting
- Thermal spraying

### CRITERIA FOR CHOICE BASED ON THE TYPE OF WORK

#### CLASS 1

Operating machines such as:

- Oxygen cutting machines
- Plasma cutting machines
- Resistance pressure welding machines
- Thermal spraying
- Welding tables

#### CLASS 2

Operating machines such as:

- In enclosed spaces
- When welding/cutting operations require reaching above head height or take place in comparable difficult positions



# EN ISO 20471

## HIGH VISIBILITY CLOTHING

This international standard specifies the requirements for clothing designed to emphasise the wearer's presence visibly in order to make the wearer more noticeable in hazardous situations during the day and at night (illumination in car headlights). It has replaced EN 471 which has now been withdrawn.

### THE CONTENTS OF THIS EN STANDARD

This standard's icon is a safety vest placed adjacent to a number which represents the design classification of the garment. The classification is 1, 2 or 3 where Class 1 provides the minimal level of visibility and class 3 provides the highest level prescribed by the standard.

### THE CLASSIFICATION

The classification is derived from the number of square metres of fluorescent fabric and the number of square metres of reflective strip incorporated in a garment.

	CLASS 1	CLASS 2	CLASS 3
FLUORESCENT MATERIAL	0,14	0,50	0,80
REFLECTIVE MATERIAL	0,10	0,13	0,20
COMBINED MATERIAL	0,20		

EN ISO 20471 provides the following guidance on risk factors and selection of clothing:

RISK LEVEL	FACTORS RELATED TO THE RISK LEVEL		RISK LEVEL
	VEHICLE SPEED	TYPE OF ROAD USER	
HIGH RISK ISO 20471 CLASS 3	> 60 km/hr	PASSIVE	High Visibility Day & Night Visibility 3600 (visible from all sides) Design for form recognition Encircling the torso Quantity and Quality for day & night
HIGH RISK ISO 20471 CLASS 2	≤ 60 km/hr	PASSIVE	
HIGH RISK ISO 20471 CLASS 1	≤ 30 km/hr	PASSIVE	

The fluorescent fabric must encircle the torso, sleeves and trouser legs with at least 40%, or the minimum required area, of fluorescent material present on the front of the garment (and on the back of the garment). The reflective strips must be 50mm wide and the space between 2 reflective strips must be at least 50mm. The distance from 'the end' of the garment (e.g. the end of a trouser leg) to the reflective strip must also be at least 50mm. Reflective strips can be positioned in a variety of different ways; Class 3 garments must cover the wearer's torso and have either reflective strips about the sleeves or full length trouser legs.



# EN ISO 14116

## PROTECTION AGAINST HEAT & FLAME, LIMITED FLAME SPREAD

This standard replaces the withdrawn EN533. While the standard does deal with the issue of flame resistance to some extent, it is arguably more suited to outerwear that would usually be worn over other protective garments. For this reason ProGARM® has opted to meet EN11612 which offers a higher standard of protection.

Clothing manufactured to this standard is made from flame retardant materials so that if the material comes into contact with a flame, it will only continue to burn for a limited amount of time. After removal from the flame, the material will stop burning. Clothing in this category should not be worn to protect against convective heat, radiant heat, molten metal or similar higher risk hazards.

### THE CONTENTS OF THIS STANDARD

For fabrics, this standard only has a flame spread test and the test results are given as index values as detailed below. The number of wash cycles and the washing method used to achieve the stated index value are also given under the EN Standard pictogram. E.g. "25H" indicates 25 domestic wash cycles (this can also be indicated as "I" for industrial wash cycles or "C" for chemical cleaning such as Dry Cleaning). The "60" represents the laboratory washing temperature in degrees Celsius. There are also requirements in this standard for the seam strength to be tested and for tests to ensure the flame retardant properties of the garment's seams meet the requirements.

### DIFFERENT TESTS, CODES

**Index 1:** No flaming to the top or side edge, no flaming debris and no afterglow shall spread from the carbonised area to the undamaged area. Hole formation is possible under this index. These fabrics should not be worn next to the skin. An example of a fabric in this category would be an FR polyester which will meet the requirements but will always form a hole.

**Index 2:** No flaming to the top or side edge, no flaming debris and no afterglow shall spread from the carbonised area to the undamaged area. No hole formation possible with this index. The requirements are the same as index 3 but no maximum afterflame time is specified.

**Index 3:** Requirements are the same as index 2, but the afterflame time of each individual specimen should not exceed 2 seconds.



# EN ISO 11612

## CLOTHING TO PROTECT AGAINST HEAT & FLAME

ProGARM® produces garments to protect wearers against heat & flame in accordance with this European Standard. This standard replaces the withdrawn EN531 standard and shows our continuous commitment to offer garments certified to the latest specifications.

### ABOUT THIS EN STANDARD

The requirements apply to clothing intended for a wide range of applications which offer limited flame spread and provide protection against various hazards including radiant heat, convective heat and splatters of molten metal. The pictogram is the same as the withdrawn EN531 standard. There are several fabric tests within this EN Standard and the results of the tests are represented by the pre-fix letters A, B, C, D, E and F. A number after these letters indicates the performance of the fabric within this test. If a (0) is shown, then the fabric has not been tested or does not achieve the lowest value attainable with the test.

### FABRIC REQUIREMENTS

General Requirement: The mechanical strength and heat resistance at a temperature of 180°C: the material shall not ignite or melt and shall not shrink by more than 5%.

### EXPLAINING THE DIFFERENT TESTS AND CODES

#### LETTER A (EN 15025)

This test consists of applying a flame to a fabric sample for 10 seconds. To pass the test, the afterflame and smoulder times and formation of holes must be within the tolerances within the standard. The application of a flame can take place in two ways:

#### CODE LETTER A1 SURFACE IGNITION, ISO15025 A

**Procedure A** (leads to Class A1), the flame is applied horizontally (similarly to EN470 and EN531).

- No specimen shall permit any part of the lowest boundary of any flame to reach the upper or either vertical edges
- No specimen shall give hole formation of 5mm or greater in any direction, except for an inter-lining that is used for specific protection other than heat and flame protection
- No specimen shall give flaming or molten debris
- The mean value of afterflame time shall be < 2s
- The mean value of afterglow time shall be < 2s

#### CODE LETTER A1 EDGE IGNITION, ISO15025 B

**Procedure B** (leads to Class A2), the flame is applied laterally.

- No specimen shall permit any part of the lowest boundary of any flame to reach the upper or either vertical edges
- No specimen shall give flaming or molten debris
- The mean value of afterflame time shall be < 2s
- The mean value of afterglow time shall be < 2s

#### LETTER B (ISO 9151)

Convective Heat: determination of the heat transmission when exposed to flames. The sample is held above the flame and the rise in temperature on the topside of the sample is measured with a calorimeter. The length of time the sample can remain exposed before its temperature rises by 24 °C is determined.

B1: 4 < 10 seconds, B2: 10 < 20 seconds, B3: 21 seconds and longer.

#### LETTER C (ISO 6942)

Exposure to radiant heat: In this test, a fabric sample is exposed to radiant heat (infrared rays). The temperature on the reverse (unexposed) side of the sample is registered using a calorimeter. Subsequently, the length of time the sample can remain exposed before its temperature rises by 24°C is measured. The test procedure is the same as ISO 11611, but the classification is different:

C1: 7 < 20 seconds, C2: 20 < 50 seconds, C3: 50 < 95 seconds, C4: 95 seconds and longer.

#### LETTER D AND E (ISO 9185)

D = Aluminium | E = Molten Iron.

Determining the level of protection against spatters of molten metal. A membrane (with similar properties to human skin) is attached to the reverse of the fabric sample sequentially rising quantities of molten metal (aluminium or iron as applicable) are splashed on the sample. The quantity of molten metal which deforms the membrane is determined.

The classification for molten aluminium is:

D1: 100 < 200 grams, D2: 200 < 350 grams, D3: 350 grams and more

The classification for molten iron is:

E1: 60 < 120 grams, E2: 120 < 200 grams, E3: 200 grams and more.

#### LETTER F (ISO 12127)

This is a new test to establish a value for contact heat.

The classification in this respect:

F1: 5 < 10 seconds, F2: 10 < 15 seconds, F3: 15 seconds and longer.



# EN 13034

## PROTECTIVE CLOTHING AGAINST LIQUID CHEMICALS

ProGARM® produces garments to protect wearers against liquid chemicals in accordance with this European Standard. These garments are suitable for use in environments where there may be a risk of chemical splashes but where a total chemical barrier is not required - \*PB = Partial Body Protection.

The EN 13034 standard specifies the requirements and test methods for Type 6 chemical protection suits for both one-off and multiple use applications. For other related accessories, such as gloves and boots, which are not an integral part of the suit, please refer to the corresponding product standards (see Product Matrix on page 102). Clothing in this category provides limited protection against small splatters or fumes of liquid chemicals. It is usually made of water-repellent, but not completely waterproof materials. Within the ProGARM® range of products this is often achieved by the use of chemical coatings such as Teflon®, which repel the contaminants and in order to preserve these properties within the fabric of the garment, special washing and drying instructions should be adhered to.

### ABOUT THIS EN STANDARD

The fabric is tested in various ways to determine its tensile strength and resistance to chemicals. In these tests, four different solutions of chemicals (Sulphuric Acid H<sub>2</sub>SO<sub>4</sub> 30%, Sodium Hydroxide NaOH 30%, O-xylene undiluted and 1-butanol undiluted) are applied to a fabric sample and the quantities of liquid that drip off and penetrate the fabric are measured and analysed must be within the tolerances set within the standard.

One finished product (of each quality) must also be analysed in a 'mannequin' test. During this spray test, the wearer must perform 7 movements (these are described in the standard) and the permeability of the garment to liquid chemicals is subsequently determined. The classes attained in the various tests must be clearly listed in the user instructions for the garment.

Where certified to EN 13034 ProGARM® garments are Type 6 garments and must undergo the spray test in order to display the EN pictogram for the standard on the user information and garment Care Label. In some of our garments it should be noted that in some instances the fabric has been tested but the garment and seams have not. In this case, this is clearly marked on the Care Label and the EN pictogram is not shown. Other requirements within the EN 13034 standard include tests for water resistance, tear strength, tensile strength and seam strength. If 2 piece garments are to be worn such as a trouser and jacket combination it is important to ensure that both garments have been certified as a 'set' for the specified level of protection.

If chemicals are splashed onto a garment, the wearer should immediately move away from the affected area and carefully remove the garment, ensuring that the chemicals or liquids do not come into contact with any part of the skin. The garment must then be cleaned and assessed for future use or taken out of use.



# EN 342

## PROTECTION AGAINST COLD

This EN standard specifies the requirements and test methods for garments and clothing combinations designed to protect the wearer in a cold environment (characterised by a combination of humidity, wind and air temperature lower than -5 °C). The standard does not contain any specific requirements for head, hand or foot protection.

### ABOUT THIS EN STANDARD

This standard's pictogram is an ice-crystal placed alongside three figures that represent the insulation (Clo), air permeability (X) and, if applicable, the water vapour resistance (Y) values. The precise meaning of these values is explained below.

### THE CLO, X AND Y VALUES

The Clo value indicates a garment's insulation properties and is a measurement of how long a person can work at a specific temperature when wearing this clothing. It is not a specific class, but can be any value. The table below shows the significance of the Clo value.

CLO	LIGHT ACTIVITY 115 W/M <sup>2</sup>		AVERAGE ACTIVITY 170 W/M <sup>2</sup>	
	8H/°C	1H/°C	8H/°C	1H/°C
2.0	1	-23	-18	-31
2.5	-6	-33	-29	-44
3.0	-13	-43	-39	-57

The X value indicates a garment's air permeability. The X value has 3 classes (1 to 3). Class 1 garments have the highest air permeability and Class 3 the least. The air permeability is a wind proofing measurement, Class 1 is therefore the least windproof and Class 3 the most.

The Y value indicates a garment's water vapour resistance. The Y value also has 3 classes (1 to 3). Class 1 garments have the lowest water vapour resistance and Class 3 garments the highest.

A more recent version (2004) of EN 342 is now available.

The new version has the following values: Icler / Icle, this is the equivalent of the Clo value and two Y values. The first Y value indicates the air permeability; it is assessed in a different way to the old EN 342, but is still given as Class 1 to 3. The second Y value indicates the garment's waterproofing. Clothing that complies with EN 342 does not necessarily have to be waterproof. This value can therefore sometimes be omitted. This value has 2 classes - 1 and 2. Class 1 is the least waterproof and Class 2 the most. If a garment is waterproof, its breathability must also be tested.



# EN 14404

## KNEE PROTECTION

Personal protective equipment. Knee protectors for work in the kneeling position.

ProGARM® produces safety garments that are certified in accordance with the EN 14404 Type 2 standard. This EN Standard relates to trousers and coveralls which offer kneepad pockets to protect the wearer when kneeling.

### ABOUT THIS EN STANDARD

EN 14404 only applies in combination with certified kneepads and a garment that has been assessed. All ProGARM® workwear garments with knee pockets comply with EN 14404 and have been assessed accordingly by a notified body.

The measurements prescribed for kneepads depend on the size of the garment in which they are used. The ProGARM® Gel Foam kneepads is our recommended kneepad for use in our garments to ensure the pad fits the pocket and offers protection for wearers from short to long leg lengths.

There are three properties of knee protectors that are tested - these are Penetration Resistance, Force Distribution and Shock Absorption. Two levels of protection can be provided. The ProGARM® Gel Foam Kneepad has been tested according to and meets the requirements for EN14404 Level 1.

**Level 1:** This level requires kneepads to provide protection on a surface on which the wearer will not generally risk injury from lying objects more than 1cm high. Penetration resistance of at least 100 N.

**Level 2:** This level requires kneepads to be able to withstand use under heavy conditions, such as kneeling on stones in mines and quarries. Penetration resistance of at least 250 N.



# EN 343

## PROTECTIVE AGAINST RAIN

This EN Standard specifies the requirements and test methods for materials and the seams of protective clothing that has been designed to give protection against precipitation (i.e. rain, snow), mist and ground moisture. There is also a separate test EN 14360 for assessing the waterproofness of the complete finished garments but this test is not included in EN 343.

### ABOUT THIS EN STANDARD

This standard's icon shows an umbrella placed under two numbers that represent the X and Y values. The X value indicates the waterproofness and the Y value indicates the water vapour permeability (the garment's breathability).

This standard falls within the scope of 'self-certification'. This means that manufacturers are allowed to certify their own products, which therefore do not need to be assessed by an independent notified body. This is because the only risk to the wearer is that he/she might get wet, which is not a life-threatening hazard. If EN 343 is used in combination with other EN Standards the whole combination of standards is assessed by the notified body

### THE X AND Y VALUES

The X value indicates the waterproofness of the garment. There are 4 classes with 4 being the highest (i.e. the most waterproof) and 1 is the lowest. A specific quantity of pressurised water is applied to the fabric and the respective Class is derived from the amount of pressure the fabric can withstand.

The Y value indicates the breathability of the fabric/s (all the layers used in the article). There are also 4 classes for breathability with Class 1 being the lowest and Class 4 the highest. Wearing Class 1 garments longer than x minutes is not recommended (the length of time the article may be worn (x) is given in the standard in a table).

# PRODUCT MATRIX

	SINGLE COLOUR COLLECTION										SINGLE COLOUR COLLECTION					TWO TONE COLOUR COLLECTION					
	5200 PAGE 20	5202 PAGE 20	5280 PAGE 21	5282 PAGE 21	5630 PAGE 22	5530 PAGE 23	5430 PAGE 24	9931 PAGE 25	5850 PAGE 26	5790 PAGE 26	7638 PAGE 27	7636 PAGE 27	7720 PAGE 28	6100 PAGE 29	6101 PAGE 29	5808 PAGE 32	5816 PAGE 33	5814 PAGE 33	5805 PAGE 34	5815 PAGE 35	5810 PAGE 35
	POLO SHIRT	LADIES' POLO SHIRT	POLO SHIRT	LADIES' POLO SHIRT	SWEATSHIRT	HOODIE	T-SHIRT	SOFTSHELL JACKET	JACKET	LINED FLEECE	TROUSER	LADIES' TROUSER	COMBAT TROUSER	COVERALL	LADIES' COVERALL	JACKET	TROUSER	LADIES' TROUSER	HI-VIS JACKET	HI-VIS TROUSER	LADIES' HI-VIS TROUSER
	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY OR ORANGE	NAVY	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW
	260 GMS	260 GMS	210 GMS	210 GMS	320 GMS	320 GMS	200 GMS	340 GMS	250 GMS	310 GMS + 230 GMS	250 GMS	250 GMS	300 GMS	250 GMS	250 GMS	300 GMS	300 GMS	300 GMS	300 GMS	300 GMS	300 GMS
PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC <small>OPEN ARC TEST METHOD CAL/RATING</small>	14.2 CAL/CM²	14.2 CAL/CM²	7 CAL/CM²	7 CAL/CM²	14.4 CAL/CM²	13.2 CAL/CM²		28 CAL/CM²	9.5 CAL/CM²	32.3 CAL/CM²	9.5 CAL/CM²	9.5 CAL/CM²	12.8 CAL/CM²	9.5 CAL/CM²	9.5 CAL/CM²	12 CAL/CM²	12 CAL/CM²	12 CAL/CM²	12 CAL/CM²	12 CAL/CM²	12 CAL/CM²
PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC <small>BOX TEST METHOD, CLASS 1 OR 2</small>	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 2	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1
CLOTHING TO PROTECT AGAINST HEAT & FLAME <small>LETTER 'A' LIMITED FLAME SPREAD, LETTER 'B' CONVECTIVE HEAT, LETTER 'C' RADIANT HEAT, LETTER 'D' MOLTEN ALUMINIUM SPLASH, LETTER 'E' MOLTEN IRON SPLASH, LETTER 'F' CONTACT HEAT</small>	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1, F1	A1, B1, C1	A1, B1, C1, F1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1
PROTECTIVE CLOTHING WITH ELECTROSTATIC PROPERTIES	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PROTECTIVE CLOTHING FOR WELDING AND ALLIED PROCESSES <small>(CLASS 1 OR 2)</small>									CLASS 1, A1		CLASS 1, A1	CLASS 1, A1		CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1
HIGH VISIBILITY CLOTHING <small>(CLASS 1, 2 OR 3)</small>																			CLASS 2	CLASS 1	CLASS 1
RAIL STANDARD HIGH VISIBILITY GO/RT <small>RIS 3279</small>																					
PROTECTION AGAINST RAIN																					
PROTECTION AGAINST CHEMICAL LIQUIDS															GARMENT	GARMENT	GARMENT	GARMENT	GARMENT	GARMENT	GARMENT

# PRODUCT MATRIX

## TWO TONE COLOUR COLLECTION

<b>7715</b> PAGE 36	<b>7522</b> PAGE 37	<b>6458</b> PAGE 38	<b>6444</b> PAGE 39	<b>6446</b> PAGE 39	<b>6460</b> PAGE 40	<b>4658</b> PAGE 40	<b>5286</b> PAGE 44	<b>5287</b> PAGE 44
HI-VIS COMBAT TROUSER	HI-VIS DUNGAREE	COVERALL	COVERALL	LADIES' COVERALL	COVERALL	COVERALL	POLO SHIRT	LADIES' POLO SHIRT
NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV YELLOW	NAVY/ HV ORANGE	HV YELLOW	HV YELLOW
300 GMS	300 GMS	240 GMS	300 GMS	300 GMS	160 GMS	290GMS + 240 GMS	210 GMS	210 GMS

## HI-VIS YELLOW COLLECTION

<b>5626</b> PAGE 45	<b>9930</b> PAGE 46	<b>7418</b> PAGE 47	<b>7414</b> PAGE 47	<b>9750</b> PAGE 48	<b>9880</b> PAGE 49	<b>7480</b> PAGE 50	<b>7482</b> PAGE 50	<b>9720</b> PAGE 51	<b>9820</b> PAGE 52
SWEATSHIRT	SOFTSHELL JACKET	TROUSER	LADIES' TROUSER	WATERPROOF JACKET	WATERPROOF SALOPETTES	COVERALL	LADIES' COVERALL	LIGHTWEIGHT WATERPROOF JACKET	LIGHTWEIGHT WATERPROOF SALOPETTES
HV YELLOW	HV YELLOW/ NAVY	HV YELLOW	HV YELLOW	HV YELLOW/ NAVY	HV YELLOW/ NAVY	HV YELLOW	HV YELLOW	HV YELLOW/ NAVY	HV YELLOW/ NAVY
320 GMS	340 GMS	250 GMS	250 GMS	395 GMS + 200 GMS	395 GMS + 200 GMS	250 GMS	250 GMS	250 GMS + 120 GMS	250 GMS + 120 GMS

	PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC OPEN ARC TEST METHOD CAL RATING	12 CAL/CM²	12 CAL/CM²	9.5 CAL/CM²	12 CAL/CM²	12 CAL/CM²	5 CAL/CM²	8 CAL/CM²			13.2 CAL/CM²	28 CAL/CM²	9.5 CAL/CM²	9.5 CAL/CM²	47 CAL/CM²	47 CAL/CM²	9.5 CAL/CM²	9.5 CAL/CM²	25 CAL/CM²	25 CAL/CM²
	PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC BOX TEST METHOD, CLASS 1 OR 2	APC1	APC1	CLASS 1	CLASS 1	CLASS 1	APC 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 2	CLASS 1	CLASS 1	CLASS 2	CLASS 2	CLASS 1	CLASS 1	APC 2	APC 2
	CLOTHING TO PROTECT AGAINST HEAT & FLAME LETTER 'A' LIMITED FLAME SPREAD, LETTER 'B' CONVECTIVE HEAT, LETTER 'C' RADIANT HEAT, LETTER 'D' MOLTEN ALUMINIUM SPLASH, LETTER 'E' MOLTEN IRON SPLASH, LETTER 'F' CONTACT HEAT	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, E1	A1, B1, C1, E1	A1, B1, C1, D2, E3, F1	A1, B1, C1, D2, E3, F1	A1, B1, C1	A1, B1, C1	A1, B1, C1, D1, E1, F1	A1, B1, C1, D1, E1, F1
	PROTECTIVE CLOTHING WITH ELECTROSTATIC PROPERTIES	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑	☑
	PROTECTIVE CLOTHING FOR WELDING AND ALLIED PROCESSES (CLASS 1 OR 2)			CLASS 1, A1	CLASS 1, A1	CLASS 1, A1		CLASS 1, A1					CLASS 1, A1	CLASS 1, A1	CLASS 2, A1	CLASS 2, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1
	HIGH VISIBILITY CLOTHING (CLASS 1, 2 OR 3)	CLASS 1	CLASS 1	CLASS 3	CLASS 3	CLASS 2	CLASS 3	CLASS 3	CLASS 3	CLASS 3	CLASS 3	CLASS 3	CLASS 2	CLASS 2	CLASS 3	CLASS 2	CLASS 3	CLASS 3	CLASS 3	CLASS 1
	RIS 3279 RAIL STANDARD HIGH VISIBILITY GO/RT																			
	PROTECTION AGAINST RAIN														CLASS 3/3	CLASS 3/3			CLASS 3/3	CLASS 3/3
	PROTECTION AGAINST CHEMICAL LIQUIDS														GARMENT	GARMENT			GARMENT	GARMENT

# PRODUCT MATRIX

	HI-VIS ORANGE COLLECTION										HI-VIS ORANGE COLLECTION										BASELAYERS COLLECTION									
	5290 PAGE 56	5292 PAGE 56	5648 PAGE 57	4608 PAGE 58	4616 PAGE 59	4614 PAGE 59	9440 PAGE 60	9660 PAGE 61	4690 PAGE 62	4692 PAGE 62	9422 PAGE 63	9622 PAGE 64	8210 PAGE 68	8220 PAGE 69	8100 PAGE 70	8300 PAGE 70	8400 PAGE 70	8700 PAGE 71	8770 PAGE 72	2101 PAGE 72	2102 PAGE 72									
	POLO SHIRT	LADIES' POLO SHIRT	SWEATSHIRT	JACKET	TROUSER	LADIES' TROUSER	WATER-PROOF JACKET	WATER-PROOF SALOPETTES	COVERALL	LADIES' COVERALL	LIGHTWEIGHT WATERPROOF JACKET	LIGHTWEIGHT WATERPROOF SALOPETTES	BASELAYER TOP	BASELAYER LEGGINGS	BALACLAVA	SNOOD	HELMET LINER	BOXER BRIEFS	FR BRA	COMPRESSION SOCKS	GENERAL BOOT SOCKS									
	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	HV ORANGE	NAVY	NAVY	NAVY	NAVY	NAVY	NAVY	BLACK	NAVY	NAVY									
	220 GMS	220 GMS	430 GMS	290 GMS	290 GMS	290 GMS	395 GMS + 200 GMS	395 GMS + 200 GMS	290 GMS	290 GMS	250 GMS + 120 GMS	250 GMS + 120 GMS	220 GMS	220 GMS	220 GMS	220 GMS	220 GMS	180 GMS	330 GMS	180 GMS	180 GMS									
	PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC OPEN ARC TEST METHOD CAL/RATING	6 CAL/CM²	6 CAL/CM²	21.6 CAL/CM²	8 CAL/CM²	8 CAL/CM²	8 CAL/CM²	47 CAL/CM²	47 CAL/CM²	8 CAL/CM²	8 CAL/CM²	25 CAL/CM²	25 CAL/CM²	4.9 CAL/CM²	4.9 CAL/CM²															
	PROTECTIVE CLOTHING AGAINST THE THERMAL HAZARDS OF ELECTRIC ARC BOX TEST METHOD, CLASS 1 OR 2	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 1	CLASS 2	CLASS 2	CLASS 1	CLASS 1	APC 2	APC 2																	
	CLOTHING TO PROTECT AGAINST HEAT & FLAME LETTER 'A' LIMITED FLAME SPREAD, LETTER 'B' CONVECTIVE HEAT, LETTER 'C' RADIANT HEAT, LETTER 'D' MOLTEN ALUMINIUM SPLASH, LETTER 'E' MOLTEN IRON SPLASH, LETTER 'F' CONTACT HEAT	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1, D2, E3, F1	A1, B1, C1, D2, E3, F1	A1, B1, C1, F1	A1, B1, C1, F1	A1, B1, C1 D1, E1, F1	A1, B1, C1 D1, E1, F1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1	A1, B1, C1	INDEX 3	INDEX 3								
	PROTECTIVE CLOTHING WITH ELECTROSTATIC PROPERTIES	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>								
	PROTECTIVE CLOTHING FOR WELDING AND ALLIED PROCESSES (CLASS 1 OR 2)				CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 2, A1	CLASS 2, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1	CLASS 1, A1																	
	HIGH VISIBILITY CLOTHING (CLASS 1, 2 OR 3)	CLASS 3	CLASS 3	CLASS 3	CLASS 3	CLASS 1	CLASS 1	CLASS 3	CLASS 2	CLASS 3	CLASS 3	CLASS 3	CLASS 1																	
	RAIL STANDARD HIGH VISIBILITY RIS 3279	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1	ISSUE 1																	
	PROTECTION AGAINST RAIN							CLASS 3/3	CLASS 3/3																					
	PROTECTION AGAINST CHEMICAL LIQUIDS							GARMENT	GARMENT																					

# SIZE GUIDELINES

POLO SHIRTS, T-SHIRTS, SWEATSHIRTS, JACKETS									
UK	XS	S	M	L	XL	2XL	3XL	4XL	5XL
CHEST TO FIT (INCHES)	34-36	36-38	38-41	41-44	44-46	46-50	50-52	52-56	56-58
CHEST TO FIT (CMS)	85-90	90-95	95-102.5	102.5-110	110-115	115-125	125-130	130-140	140-145
EUR	44-46	46-48	48-52	52-56	56-58	58-62	62-64	64-66	66-68
DE	42-44	44-46	46-50	50-54	54-56	56-60	60-62	62-66	66-68
NL	42-44	44-46	46-50	50-54	54-56	56-60	60-62	62-66	66-68

LADIES POLO SHIRTS									
UK	8	10	12	14	16	18	20	22	24
BUST TO FIT (INCHES)	34-36	36-38	38-40	40-42	42-44	44-46	46-48	48-50	50-52
BUST TO FIT (CMS)	85-90	90-95	95-100	100-105	105-110	110-115	115-120	120-125	125-130
EUR	44-46	46-48	48-50	50-54	54-56	56-58	58-60	60-62	62-64
DE	42-44	44-46	46-48	48-52	52-54	54-56	56-58	58-60	60-62
NL	42-44	44-46	46-48	48-52	52-54	54-56	56-58	58-60	60-62

WATERPROOF JACKETS									
UK	XS	S	M	L	XL	2XL	3XL	4XL	5XL
CHEST TO FIT (INCHES)	34-36	36-38	38-41	41-44	44-46	46-50	50-52	52-56	56-58
CHEST TO FIT (CMS)	85-90	90-95	95-102.5	102.5-110	110-115	115-125	125-130	130-140	140-145
EUR	44-46	46-48	48-52	52-56	56-58	58-62	62-64	64-66	66-68
DE	42-44	44-46	46-50	50-54	54-56	56-58	58-60	60-62	62-64
NL	42-44	44-46	46-50	50-54	54-56	56-58	58-60	60-62	62-64

WATERPROOF SALOPETTES									
UK	XS	S	M	L	XL	2XL	3XL	4XL	5XL
WAIST TO FIT (INCHES)	35	37	39	41	43	45	47	49	51
WAIST TO FIT (CMS)	89	94	99	104	109	114	119	124	129
INSIDE LEG TO FIT (INCHES)	32	32	32	32	32	32	32	32	32
INSIDE LEG TO FIT (CMS)	81	81	81	81	81	81	81	81	81
EUR	50R	52R	54R	56R	58R	60R	62R	64R	66R
DE	48	50	52	54	56	58	60	62	64
NL	48R	50R	52R	54R	56R	58R	60R	62R	64R

BASELAYERS									
UK	XS	S	M	L	XL	2XL	3XL	4XL	5XL
CHEST TO FIT (INCHES)	34-36	36-38	38-41	41-44	44-46	46-50	50-52	52-56	56-58
CHEST TO FIT (CMS)	85-90	90-95	95-102.5	102.5-110	110-115	115-125	125-130	130-140	140-145
WAIST TO FIT (INCHES)	26.8	29.9	33.1	36.2	39.4	42.5	45.7	48.8	51.9
WAIST TO FIT (CMS)	68	76	84	92	100	108	116	124	132
BODY LENGTH (CMS)	164-172	164-172	172-180	172-180	180-188	180-188	188-196	188-196	188-196

MENS TROUSERS/DUNGAREES (SHORT)													
UK	30"S	32"S	34"S	35"S	36"S	38"S	40"S	42"S	44"S	46"S	48"S	50"S	52"S
WAIST TO FIT (INCHES)	30	32	34	35	36	38	40	42	44	46	48	50	52
WAIST TO FIT (CMS)	75	80	85	87.5	90	95	100	105	110	115	120	125	130
INSIDE LEG TO FIT (INCHES)	30	30	30	30	30	30	30	30	30	30	30	30	30
INSIDE LEG TO FIT (CMS)	76	76	76	76	76	76	76	76	76	76	76	76	76
EUR	44S	46S	50S	51S	52S	54S	56S	58S	60S	62S	64S	66S	68S
DE	22	23	24	25	26	27	28	29	30	31	32	33	34
NL	42S	44S	48S	49S	50S	52S	54S	56S	58S	60S	62S	64S	66S
SE	D84	D88	D92	D94	D96	D100	D104	D108	D112	D116	D120	D124	D128

MENS TROUSERS/DUNGAREES (REGULAR)													
UK	30"R	32"R	34"R	35"R	36"R	38"R	40"R	42"R	44"R	46"R	48"R	50"R	52"R
WAIST TO FIT (INCHES)	30	32	34	35	36	38	40	42	44	46	48	50	52
WAIST TO FIT (CMS)	75	80	85	87.5	90	95	100	105	110	115	120	125	130
INSIDE LEG TO FIT (INCHES)	32	32	32	32	32	32	32	32	32	32	32	32	32
INSIDE LEG TO FIT (CMS)	81	81	81	81	81	81	81	81	81	81	81	81	81
EUR	44R	46R	50R	51R	52R	54R	56R	58R	60R	62R	64R	66R	68R
DE	44	46	48	50	52	54	56	58	60	62	64	66	68
NL	42R	44R	48R	49R	50R	52R	54R	56R	58R	60R	62R	64R	66R
SE	C44	C46	C50	C51	C52	C54	C56	C58	C60	C62	C64	C66	C68

MENS TROUSERS/DUNGAREES (TALL)													
UK	30" T	32" T	34" T	35" T	36" T	38" T	40" T	42" T	44" T	46" T	48" T	50" T	52" T
WAIST TO FIT (INCHES)	30	32	34	35	36	38	40	42	44	46	48	50	52
WAIST TO FIT (CMS)	75	80	85	87.5	90	95	100	105	110	115	120	125	130
INSIDE LEG TO FIT (INCHES)	34	34	34	34	34	34	34	34	34	34	34	34	34
INSIDE LEG TO FIT (CMS)	86	86	86	86	86	86	86	86	86	86	86	86	86
EUR	44L	46L	50L	51L	52L	54L	56L	58L	60L	62L	64L	66L	68L
DE	90	94	98	102	106	110	114	118	122	126	130	134	138
NL	42L	44L	48L	49L	50L	52L	54L	56L	58L	60L	62L	64L	66L
SE	C144	C146	C150	C151	C152	C154	C156	C158	C160	C162	C164	C166	C168

MENS COVERALLS (SHORT)													
UK	38"S	40"S	42"S	43"S	44"S	46"S	48"S	50"S	52"S	54"S	56"S	58"S	60"S
CHEST TO FIT (INCHES)	36-38	38-40	40-42	42-43	43-44	44-46	46-48	48-50	50-52	52-54	54-56	56-58	58-60
CHEST TO FIT (CMS)	90-95	95-100	100-105	105-107.5	107.5-110	110-115	115-120	120-125	125-130	130-135	135-140	140-145	145-150
INSIDE LEG TO FIT (INCHES)	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5
INSIDE LEG TO FIT (CMS)	75	75	75	75	75	75	75	75	75	75	75	75	75
EUR	48S	50S	54S	55S	56S	58S	60S	62S	64S	66S	68S	70S	72S
DE	24	25	26	27	28	29	30	31	32	-	33	-	34
NL	46S	48S	52S	53S	54S	56S	58S	60S	62S	64S	66S	68S	70S

MENS COVERALLS (REGULAR)													
UK	38"R	40"R	42"R	43"R	44"R	46"R	48"R	50"R	52"R	54"R	56"R	58"R	60"R
CHEST TO FIT (INCHES)	36-38	38-40	40-42	42-43	43-44	44-46	46-48	48-50	50-52	52-54	54-56	56-58	58-60
CHEST TO FIT (CMS)	90-95	95-100	100-105	105-107.5	107.5-110	110-115	115-120	120-125	125-130	130-135	135-140	140-145	145-150
INSIDE LEG TO FIT (INCHES)	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5
INSIDE LEG TO FIT (CMS)	80	80	80	80	80	80	80	80	80	80	80	80	80
EUR	48R	50R	54R	55R	56R	58R	60R	62R	64R	66R	68R	70R	72R
DE	48	50	52	54	56	58	60	62	64	65	66	67	68
NL	46R	48R	52R	53R	54R	56R	58R	60R	62R	64R	66R	68R	70R

MENS COVERALLS (TALL)													
UK	38" T	40" T	42" T	43" T	44" T	46" T	48" T	50" T	52" T	54" T	56" T	58" T	60" T
CHEST TO FIT (INCHES)	36-38	38-40	40-42	42-43	43-44	44-46	46-48	48-50	50-52	52-54	54-56	56-58	58-60
CHEST TO FIT (CMS)	90-95	95-100	100-105	105-107.5	107.5-110	110-115	115-120	120-125	125-130	130-135	135-140	140-145	145-150
INSIDE LEG TO FIT (INCHES)	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5	33.5
INSIDE LEG TO FIT (CMS)	85	85	85	85	85	85	85	85	85	85	85	85	85
EUR	48L	50L	54L	55L	56L	58L	60L	62L	64L	66L	68L	70L	72L
DE	98	102	106	110	114	118	122	126	130	132	134	136	138
NL	46L	48L	52L	53L	54L	56L	58L	60L	62L	64L	66L	68L	70L

LADIES TROUSERS/DUNGAREES (SHORT)									
UK	8S	10S	12S	14S	16S	18S	20S	22S	24S
WAIST TO FIT (INCHES)	30.7	32.7	34.6	36.6	38.6	40.6	42.5	44.5	46.5
WAIST TO FIT (CMS)	78	83	88	93	98	103	108	113	118
HIPS TO FIT (INCHES)	40.6	42.5	44.5	46.5	48.4	50.4	52.4	54.3	56.3
HIPS TO FIT (CMS)	103	108	113	118	123	128	133	138	143
INSIDE LEG TO FIT (INCHES)	27.6	27.6	27.6	27.6	27.6	27.6	27.6	27.6	27.6
INSIDE LEG TO FIT (CMS)	70	70	70	70	70	70	70	70	70
DE	17	18	19	20	21	22	23	24	25
SE	D17	D18	D19	D20	D21	D22	D23	D24	D25

LADIES TROUSERS/DUNGAREES (REGULAR)									
UK	8R	10R	12R	14R	16R	18R	20R	22R	


LADIES TROUSERS/DUNGAREES (TALL)									
UK	8T	10T	12T	14T	16T	18T	20T	22T	24T
WAIST TO FIT (INCHES)	30.7	32.7	34.6	36.6	38.6	40.6	42.5	44.5	46.5
WAIST TO FIT (CMS)	78	83	88	93	98	103	108	113	118
HIPS TO FIT (INCHES)	40.6	42.5	44.5	46.5	48.4	50.4	52.4	54.3	56.3
HIPS TO FIT (CMS)	103	108	113	118	123	128	133	138	143
INSIDE LEG TO FIT (INCHES)	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5
INSIDE LEG TO FIT (CMS)	80	80	80	80	80	80	80	80	80
DE	68	72	76	80	84	88	92	96	100
SE	C136	C138	C140	C142	C144	C146	C148	C150	C152

LADIES COVERALLS (SHORT)									
UK	8S	10S	12S	14S	16S	18S	20S	22S	24S
BUST TO FIT (INCHES)	34-36	36-38	38-40	40-42	42-44	44-46	46-48	48-50	50-52
BUST TO FIT (CMS)	85-90	90-95	95-100	100-105	105-110	110-115	115-120	120-125	125-130
INSIDE LEG TO FIT (INCHES)	27.6	27.6	27.6	27.6	27.6	27.6	27.6	27.6	27.6
INSIDE LEG TO FIT (CMS)	70	70	70	70	70	70	70	70	70

LADIES COVERALLS (REGULAR)									
UK	8R	10R	12R	14R	16R	18R	20R	22R	24R
BUST TO FIT (INCHES)	34-36	36-38	38-40	40-42	42-44	44-46	46-48	48-50	50-52
BUST TO FIT (CMS)	85-90	90-95	95-100	100-105	105-110	110-115	115-120	120-125	125-130
INSIDE LEG TO FIT (INCHES)	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5	29.5
INSIDE LEG TO FIT (CMS)	75	75	75	75	75	75	75	75	75

LADIES COVERALLS (TALL)									
UK	8T	10T	12T	14T	16T	18T	20T	22T	24T
BUST TO FIT (INCHES)	34-36	36-38	38-40	40-42	42-44	44-46	46-48	48-50	50-52
BUST TO FIT (CMS)	85-90	90-95	95-100	100-105	105-110	110-115	115-120	120-125	125-130
INSIDE LEG TO FIT (INCHES)	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5	31.5
INSIDE LEG TO FIT (CMS)	80	80	80	80	80	80	80	80	80

Note: This size chart was correct at the time of going to print.

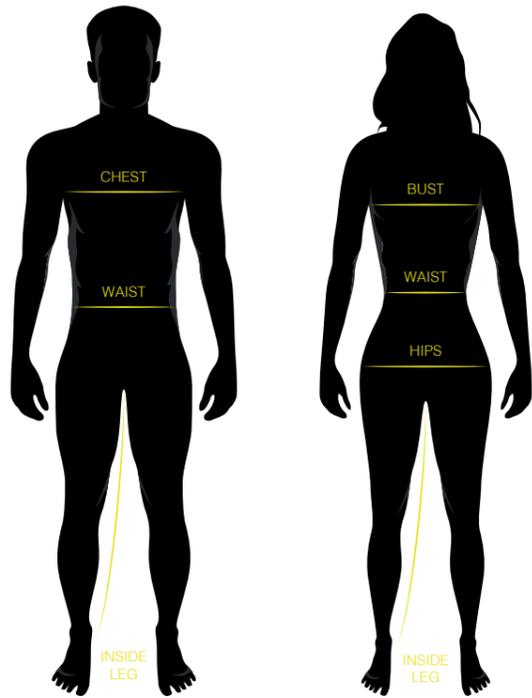

## HOW TO MEASURE AND PICK THE RIGHT SIZE

### Chest / Bust measurement

Measure the circumference of your chest/bust below the armpit, measure the widest point.

**Example 1:** if your chest measures 102cm, for polo shirt the most suitable size would be M.

**Example 2:** if your bust measures 98cm, for ladies' polo shirt the most suitable size would be 12.

Note: some garments such as Softshell Jackets would have a slim fit and it may be best to pick one size up if you prefer a looser fit.

### Waist measurement

Measure tightly around the waist and pick size accordingly, if your measurements fall in-between two sizes, we recommend picking the larger one, remember to check your inside leg measurement.

### Hip measurement

Measure tightly around the widest part of the hip, also measure the waist and pick size accordingly. If your measurements fall in-between two sizes, we recommend picking the larger one, remember to check your inside leg measurement.

### Inside leg measurement

Measure the distance between crotch and ankle and pick size that is the same or slightly longer than your measurement.

# BRANDING AND GARMENT ALTERATIONS

## BRANDING

We recommend using flame resistant heat transfers or flame resistant embroidery threads for branding on any of our arc flash and flame resistant garments to ensure compliance with the original CE certification. We also take care when adding branding to hi-vis garments, that large logos don't reduce the surface area of the background material as specified in EN20471 and EN471.



## FLAME RESISTANT HEAT TRANSFERS

Heat applied transfers contain a flame resistant component and have been tested and certified to the EN11612 Heat & Flame European Standard. Transfers are easy to apply using an industrial heat press and can be printed in any Pantone® colour for exact replication of your company logo or brand. We can pre-order bulk quantity transfers and apply them to your garments quickly before dispatch.



## FR EMBROIDERY THREADS

Standard embroidery threads are usually polyester blends which burn, melt and drip when exposed to flame, so using this type of thread on embroidered designs poses a serious risk. We always use military grade meta-aramid flame resistant threads when applying emblems to any of our garments.

## GARMENT ALTERATIONS

All our products are stocked for fast delivery, but we can make alterations providing they don't compromise the conformity of the garment. We can shorten and re-hem trousers or some coveralls for example. For special sizes, or more detailed alterations, please contact our Customer Service Team to discuss how we can help and the typical delivery times and minimum order quantities.







**ProGARM**<sup>®</sup>  
PROTECTING LIVES

**ProGARM<sup>®</sup> United Kingdom**

Dianthus Business Park,  
Common Lane,  
Newport, Brough,  
East Yorkshire,  
HU15 2FT

**Tel: +44 (0)1482 679600**

**Email: [sales@progarm.com](mailto:sales@progarm.com)**

**Web: [www.progarm.com](http://www.progarm.com)**

Whilst every effort has been made to ensure the accuracy of all product descriptions, sizes and specifications, continual development of our product range means that certain details may change without notice. Though we make every attempt to ensure the colours of our products are reproduced as accurately as possible, they are provided for illustrative purposes and may differ from the actual product you receive. We reserve the right to improve products from our collection without notices.

ProGARM<sup>®</sup>, VXS+, ThermSAFE and SafetyICON, and any graphic devices, are all registered trademarks of ProGARM<sup>®</sup> Ltd